


ScopeCorder DL750

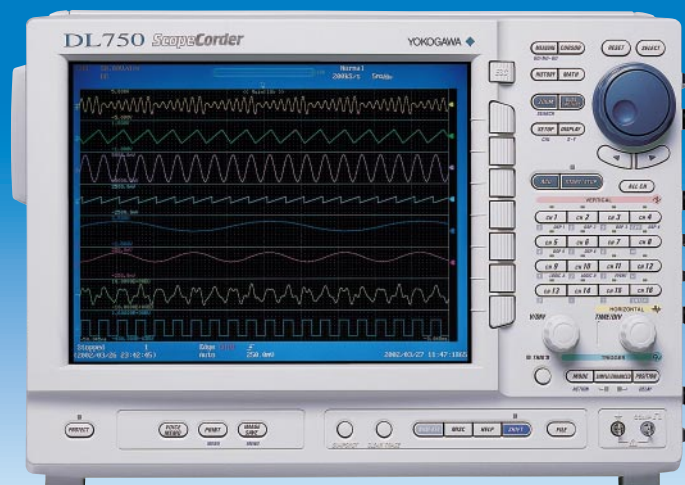

- Up to 16 analog channels and 16-bit logic input
- Up to 1 GigaWord total memory
 - GIGAZoom function
 - DualCapture function
- 10.4-inch SVGA color TFT liquid crystal display
- 10 MS/s, 12-bit A/D resolution, 2-channel isolation module
- Floppy disk, ZIP® disk and PC card drives available
- 20-GB internal hard drive (optional)

New Functions/New Modules

- DSP math function (optional)
- Voice memo function
- Wave window trigger
- High-speed 10 MS/s 12-bit non-isolation module (2 CH)
- Strain modules (2 CH)
- High-voltage 100 kS/s 16-bit isolation module (with RMS) (2 CH)

ScopeCorder: A new measurement tool combining the functions of an oscilloscope for capturing instantaneous phenomena, and a data recorder for monitoring long-term trends

ScopeCorder

GIGAZoom

Mixed Signal

DualCapture



- **High-Speed 10 MS/s 12-Bit Isolation Module (701250)**
Broad bandwidth (3 MHz) and high accuracy (0.5%) inputs
- **High-Speed 1 MS/s 16-Bit Isolation Module (701251)**
High resolution inputs combined with high-sensitivity (1 mV/div)
- **Temperature/High-Precision Voltage Module (701265)**
100 Hz frequency range, high-accuracy (0.08%) voltage measurements, and an ultra high-sensitivity range (100 μ V/div)

Modules

Leading-Edge Mounting Technology and ASICs Reduce the Size of 2-Channel Modules


4 new modules for a variety of applications

- **High-Speed 10 MS/s 12-Bit Non-Isolation Module (701255) NEW**
Non-isolated model with the same performance as the model 701250
- **High-Voltage 100 kS/s 16-Bit Isolation Module (with RMS) (701260) NEW**
850 V (DC+ACpeak) direct input, RMS mode
Accuracy of 0.25%
- **Strain Modules (701270 & 701271) NEW**
NDIS-type (701270) and DSUB-type (701271)
Wide range of bridge voltages (2 V, 5 V, & 10 V)
Accuracy of 0.5%

GIGAZoom Function for Instantaneous Full-Length Display of 1 GW of Data

A large-scale, high speed ASIC was created to give the DL750 the ability to show the entire 1 GW of data on the display in real time

Two zoom windows are available for displaying up to 500 MW of data. Zooming can be done in real-time or after data recording has stopped.

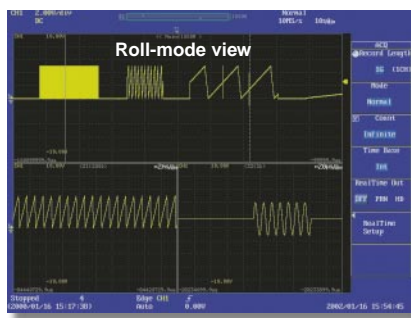

1 GW memory for full-length display and instantaneous zooming (to user-specified size)

Sample Rate	Maximum Recording Time			
	Seconds	Minutes	Hours	Days
10 MS/s	100 seconds	1.67	0.028	0.001
1 MS/s	600	10 minutes	0.167	0.007
100 kS/s	9000	150 minutes	2.5 hours	0.10
10 kS/s	72000	1200	20 hours	0.83 day
1 kS/s	864000	14400	240.0	10 days
200 S/s	2592000	43200	720.0	30 days

■ Amount of time data can be recorded with 1 GW memory

DualCapture: A Powerful Tool for Durability Test Data Analysis

Simultaneous High-Speed and Low-Speed Recording Using DualCapture

During durability testing, it is necessary to monitor the long-term trends of your data as well as capture the high speed transients that might occur. This presents a challenge as trend data is usually recorded at a slower sampling speed that might miss the transient phenomena. To meet this challenge, the DL750 offers the DualCapture function.

Using DualCapture, you can now record your trend data with a slow sampling speed and still be able to capture the transient phenomena with a faster sampling speed.

■ Integration of a High-Speed Sampler (Oscilloscope) and Low-Speed Sampler (Recorder) in a Single Unit

High-speed sampler: Trigger on abnormal high-speed phenomena
Low-speed sampler: Roll recording (trend recording)

■ Separate Memory Management for Each Sampler

Maximum memory for low-speed sampler: 100 MW


Maximum memory for high-speed sampler: 10 kW × 100 screens

■ High-Speed Sampling Triggered Only by Abnormal Phenomena Occurring During Long-Term Observation (Low-Speed Sampling)


Effective for separately capturing data at high speed during measurements.

■ Long Memory Equivalent to 1 Teraword

To acquire many hours of data at the higher sampling rate (10 MS/s) would require Terawords of memory
(8 hr-240 hr) × 60 min × 60 sec × 10 MS/s × 16 channels
= 4.6-138 TW

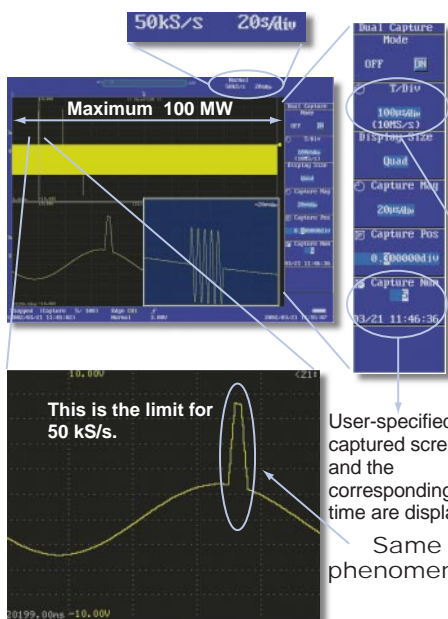

User-specified captured screen and the corresponding time are displayed.
Same phenomenon

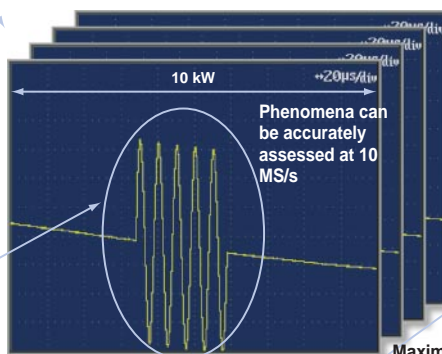

The waveform shown above was captured at a sampling rate of 50 kS/s. The occurrence of noise can be confirmed in the graph, but the time resolution is too low to capture the waveform accurately.

With DualCapture, the user sets triggers for capturing sudden phenomena. Up to 100 phenomena can be collected in a memory length of 10 kW at a maximum sampling rate of 10 MS/s.

Voice Memo Function: Save Audio Comments along with Waveform Data and Images

NEW

VOICE MEMO

Enables You to Record and Playback 2 Types of Voice Data


■ Voice Memo

Simply press a switch to record your voice while simultaneously recording waveforms. Make multiple recordings per waveform (100 seconds total, min. 3 seconds per recording).

■ Voice Comment

Record and save an explanatory comment (approx. 3-10 seconds) together with your image files.

The 701951 Earphone-Mic (with PUSH switch) is required to record voice memos and to listen to recorded voice memos.

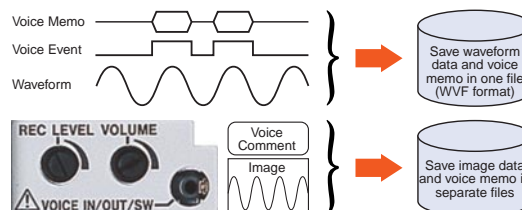

Accurately Measure and Display Complex Signals

Capturing Signals Using the Longest Memory Capacity Ever

For Accurately Capturing Complex Signals or Long Waveforms

The DL750's standard memory capacity is 50 MW (2.5 MW per channel). This can be expanded (optional) to as much as 1 GW (50 MW per channel).

■ Benefits of GigaWord Recording

You can record data for 10 days (1 day/div) on the main screen, while displaying 1-second recordings (100 ms/div) in real time on the zoom screen. The large memory capacity lets you capture all of your data while still maintaining a sample rate fast enough to see any abnormal phenomena.

■ Efficient Memory Use

Sufficient memory length is available even when 16 channels are used, so you can conduct extended observations on multiple channels (2.5 MW per channel with standard memory, 50 MW per channel with maximum memory).



Multi-Channel 2-Location Zoom Function

A Wide Range of Trigger Functions for Accurately Capturing a Variety of Waveforms

Having a wide range of triggers is of course very useful for obtaining stable observations of variety of different waveforms. In addition, the GUI menu makes setting trigger conditions easy and intuitive.

Simple and Enhanced Triggers

SIMPLE/ENHANCED	Edge trigger:	Set a regular edge trigger
	A → B (N):	Triggers the n-th time that condition B goes true after condition A has gone true.
	A Delay B:	Triggers if condition B goes true after condition A has gone true and an interval at least equal to the delay setting has elapsed.
	Edge on A:	Activates an edge trigger on another input during the interval when trigger condition A is true.
	OR:	Triggers when any one of the individual channel conditions set with the patterns goes true.
	B > TIME:	Triggers when the pulse width is longer than the set time
	B < TIME:	Triggers when the pulse width is less than the time
	B TIME OUT:	Triggers when a preset time-out time is reached
	Period:	Triggers when a preset waveform frequency condition goes true.
	Window:	Triggers when a trigger source enters or leaves a level set by two points
	Wave Window:	Triggers when a signal leaves an automatically-defined "wave window" that surrounds the waveform

Action-On Trigger

Automatically Save Measured Data

When this trigger is activated, the DL750 performs a specified action each time a waveform is captured and displayed on the screen. This feature is useful for saving data automatically and reliably (e.g., for data collection in automated, continuous tests).

Manual Trigger

A Trigger Can Be Activated with Press of a Button.


With this feature, a trigger can be executed whenever you like, separate from the preset trigger conditions.



Wave Window Trigger NEW

Automatically Triggers on Abnormalities in Power Supply Waveforms

This function comes standard with the DL750 to allow observation power supply waveforms. In addition to traditional power supply troubles, such as sudden outages, sags, and surges, you can make efficient real time observations of frequency fluctuations and voltage drops. This trigger activates when a signal exceeds the allowable values determined by comparing a defined waveform (wave window) with an actual waveform in real time. Comparative waveforms can be automatically produced in real time based on measured waveforms. Detection on all 16 analog channels is available (with OR conditions).




History Memory and Smart Search for Effective Access to Large Amounts of Captured Data

History Memory and History Search (Zone Search) HISTORY

Occasionally, you may capture an abnormal waveform and then have it quickly disappear from the display as new data is acquired. It is not always possible to manually Start and Stop data acquisition to catch the abnormal waveform and have it displayed.

The **History Memory** function was designed for such situations. It divides long memory into a number of blocks and automatically stores up to 2000 previously captured waveforms. This means you can reliably save displayed waveforms to memory even when there are phenomena for which trigger conditions cannot be set.

The **Zone Search** function lets you define zones on the screen, and find all previously captured waveforms that either pass or don't pass through the user-defined zone. Up to four zones can be defined.



Search (Edge Search) and Zoom ZOOM

The **Edge Search** counts rising and falling edges in the captured data. It automatically searches for the desired edges and displays them on a zoom screen.




DSP Channel Real-Time Math Function (with the /G3 Option) NEW

New functions are now available with the DL750. Six digital signal processing (DSP) channels have been added. The DSP channels enable you to perform math and digital filtering in real time while acquiring waveforms. Each DSP channel can perform up to four arithmetic operations and filtering at high speed, without slowing down waveform acquisitions.

Features:

- Real-time display of calculated waveforms in roll mode
- Triggers on calculated waveforms
- Calculated parameters such as cutoff of digital filtering and frequency can be changed in real time
- Simultaneously display up to 16 channels (16 analog CH + 6 DSP CH)
- Provides the same memory length as with analog channels
- Arithmetic calculations between channels (addition, subtraction, multiplication, division), digital filtering (LPF, BPF, HPF), differentiation, and integration

Architecture of DSP-CH

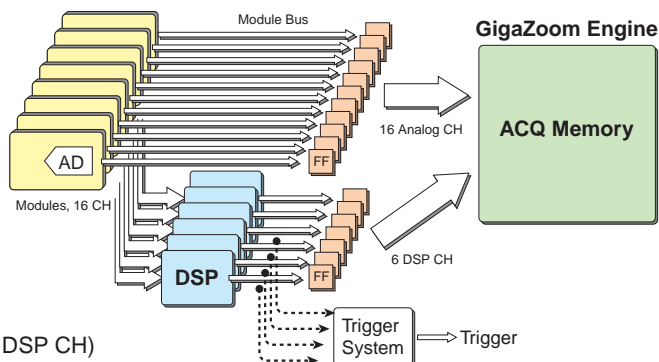

Automatically Measure Waveform Parameters

Easily Find and Display Waveform Frequency, Rise Time, and Other Parameters

Waveform parameters such as voltage, frequency, and RMS are measured automatically. In addition to general parameter measurement function, the DL750 comes standard with functions such as the following:

Cycle Statistical Calculation NEW

This function calculates statistical information about the waveform. Maximum value, minimum value, average value, and standard deviations are calculated automatically for each waveform parameter. In addition, you can instantaneously search for the cycle containing the maximum value and display it on the zoom screen. This cycle statistical calculation greatly improves your insight enabling you to analyze transient phenomena captured using the long recording memory.



User-Defined Math Function (with the /G2 Option)

Perform Complex Calculations


The DL750 comes standard with basic arithmetic operations (addition, subtraction, multiplication, division), FFT (power spectrum), and phase shifting (calculating a phase shift between channels). For more flexible and complex calculations, an optional user-defined math function package is available. With this option, you can define up to eight different formulas using a wide range of functions, including a triangle function, differentiation, integration, square root, digital filter, and seven different FFT functions. You can also specify the results of a calculation as a parameter in another formula. With these capabilities, the DL750 makes it easy to perform complex calculations that, in the past, could only have been done by loading data onto a PC.



Linear Scaling

Convert Measured Voltage Values to Physical Values for Direct Reading


This function automatically performs the following calculation based on a scaling coefficient A and offset B: $Y = AX + B$ (X is a measured value and Y is the scale value). The results of this calculation are reflected in cursor measurement values and waveform parameter measurement values. In addition, user-determined scale values can be defined for any two measurement, P1 and P2.



GO/NO-GO Judgment

Automatic Waveform Determinations

With this function, the user specifies a zone or waveform parameter for a measured waveform. The measurement signal is evaluated and a specified action is performed automatically based on the evaluation. Available actions include outputting a screenshot to a specified destination, saving waveform data to a specified storage medium, sounding a buzzer, and sending email.



Display and Data Recording Functions

Real-Time Hard Drive Recording (with the /C8 Option)

Recorder-Like Real-Time Data Recording over Extended Periods

With the optional internal hard drive, you can record measurements to the hard drive in real time. This makes it easier to manage and analyze data using PCs and other tools. Maximum data capacity: 1 GW
Maximum sampling rate: 100 kS/s (using 1 channel only)



Memory Backup Function

Protects Your Data Even If the Power Supply Goes Out

This function backs up about 10 hours of data saved to the acquisition memory immediately prior to power loss. Memory backup helps you avoid losing important data even if the power supply is unstable and gets cut off. (Backup time varies according to the usage environment. Four AA batteries are required for memory backup.)




Snapshot Function



Enables On-Screen Waveform Comparisons

Using the snapshot function, you can keep the currently displayed waveform with the touch of a button. Snapshots are useful for comparing a reference waveform with an input waveform. In addition, snapshots can be saved to and loaded from the storage media.

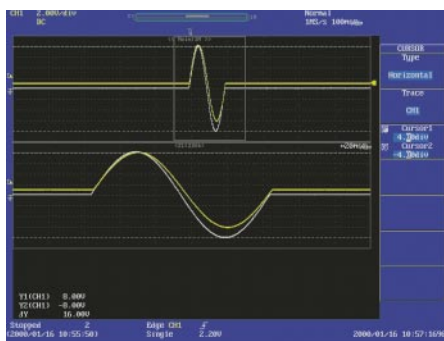


X-Y Display Function



Display an Overlay of up to Four X-Y Displays

This function lets you display multiple X-Y plots together, making relative phase comparisons easy. The X-Y display function is a powerful tool for applications such as evaluating DC motors based on a Lissajous waveform.

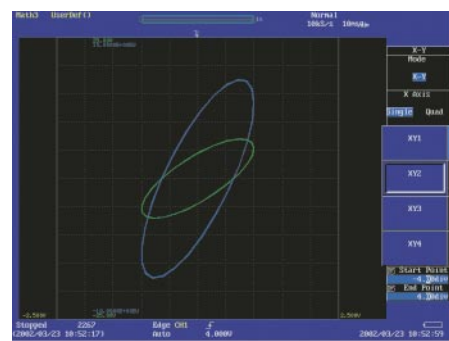


All-Channel Setup Menu

ALL CH

Quickly View the Setup of All Channels


This menu lets you review and modify all of the channel setups from a single screen display. Parameters such as voltage axis sensitivity, screen scale settings, and linear scaling can be configured for each channel.

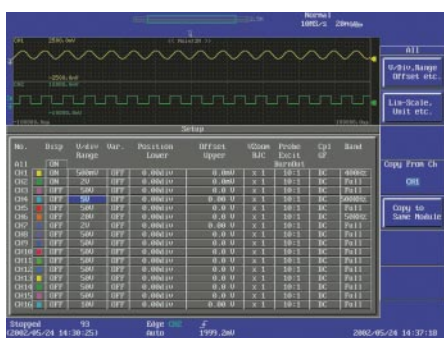


Wide Waveform Display

Increase the Viewing Area of Display

With the SVGA color TFT liquid crystal display, the number of display pixels has been greatly increased. For wide waveform display, set the resolution to 750 x 512 pixels.

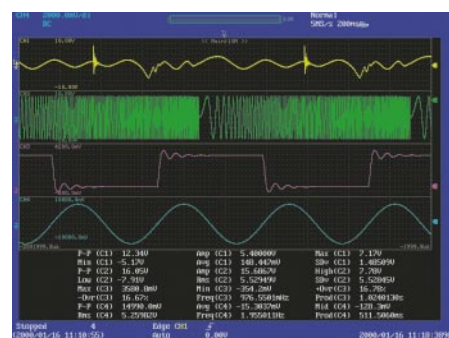

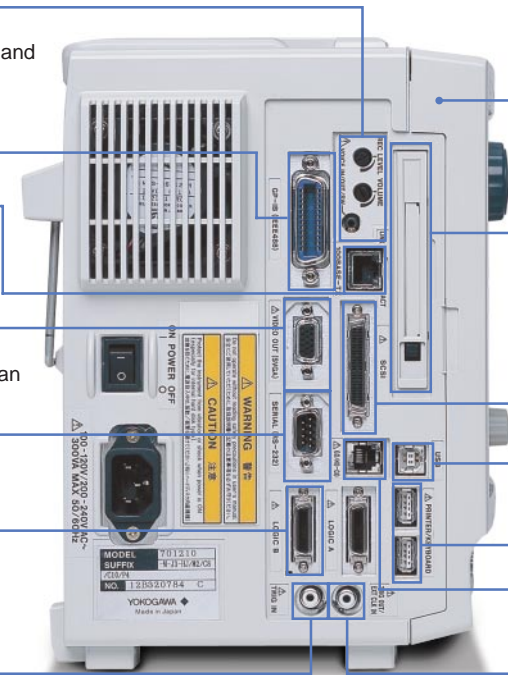- 
- Voice memo input/output
Earphone-Mic input/output
Volume control for recording and playback
 - GP-IB
 - Ethernet (optional)
Supports 100BASE-TX and 10BASE-T
 - Video Out (SVGA)
Outputs a video signal so waveform can be viewed on an external monitor
 - SERIAL (RS232)
 - Logic input (8 bits × 2)
 - External trigger input
 - Internal hard drive (optional):
20 GB (FAT32)
 - Drive (select one of three options)
 - Floppy
 - Zip® (250 MB/100 MB)
 - PC card (Flash ATA card, Compact Flash, Microdrive)¹ (up to 5 GB)
 - SCSI interface
 - USB—PC jack (complies with USB Rev. 1.1) For use with a USB mouse/keyboard/printer
 - USB peripheral jacks¹
 - GO/NO-GO I/O
External start/stop
 - Trigger output/external clock input (switch)
Outputs TTL level trigger signals
External clocks as fast as 1 MHz can be used (with 701250 or 701251).

1. Ask for information on compatible products.

USB

• Connecting to a PC

(Supported operating systems: Windows 98 SE, Windows 2000 Pro, Windows Me)

Just as for RS232 and GB-IB, you can write your own custom programs in Visual C++ 6.0 or Visual Basic 6.0 to control the DL750 through a USB interface.

PC communications are made easy with the Waveform Viewer and Wirepuller software programs.

• Connecting USB Peripheral Equipment

USB keyboards, USB mouse and USB printers can be directly connected to the DL750.



Ethernet (Optional)

• Connecting to a PC

■ Web Server and FTP Server


The DL750 has a variety of server functions that let you perform remote controls or download waveform data and screen images onto a PC. You can also access the DL750 through the Internet Explorer. Just as for RS232 and GB-IB, you can write your own custom programs in Visual C++ 6.0 or Visual Basic 6.0 to control the DL750 through a USB interface.




IMAGE SAVE Key and Thumbnail Screen Images

Simply press the **IMAGE SAVE** key to save image data to a CompactFlash card or other storage media. The saved image data (PNG, JPEG, BMP, or PostScript format) can then be displayed on the DL750's screen as thumbnails.

The **PRINT** key lets you output images to the DL750's built-in printer, a USB printer, or a network printer.

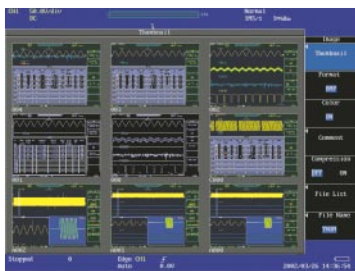

Thumbnail display

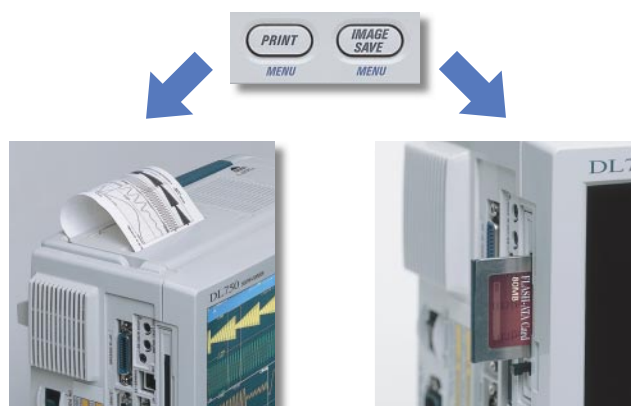

Advanced Networking and PC Connectivity



Web Server Functions

Connect the DL750 to your PC through the Ethernet connection. This allows for easy remote operation using Internet Explorer.




FTP

You can easily copy and paste files to and from a PC and the instrument's flash memory or other storage media.

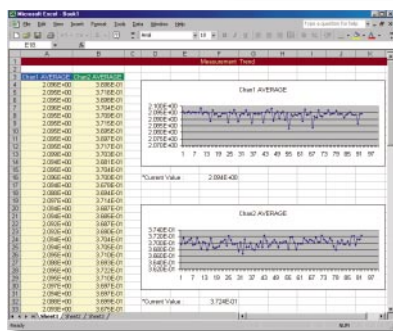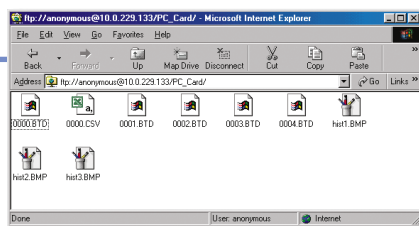

Measurement Trend

Using Internet Explorer, you can periodically or manually download screen images to a PC for remote waveform monitoring. You can also download waveform data, start or stop a measurement, or setup a split display all from a PC.

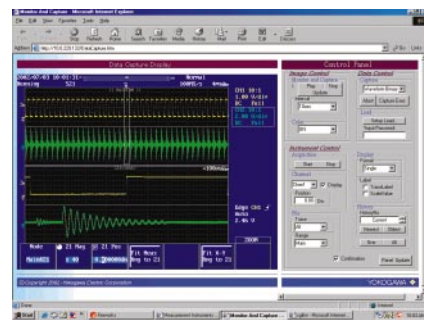


Data Capture

This function periodically downloads values of waveform parameters periodically, launches MS Excel and graphs the parameters on a spreadsheet values. This enables you to check the parameter trends at a glance.

Software for Waveform Measurement on a PC Software for Remotely Controlling the DL Series

Wirepuller



The Wirepuller software program displays a screen image of the DL's front panel on your PC so that you can monitor waveform signals. In addition, you can use the PC's mouse and keyboard to control the DL. The DL can be controlled via an Ethernet, USB, or GP-IB.


This software program can be downloaded from the following URL (requires registration):

<http://www.yokogawa.com/tm/Bu/DLsoft/wire/>

Further details are available at the YOKOGAWA web site.

Software for Using Your PC to Check Waveform Data Captured in Long Memory

Waveform Viewer for DL Series



The Waveform Viewer software program lets you view waveform signals on your PC just as they appear on the DL screen. This includes zoom display, X-Y display and the history memory thumbnail displays. In addition, data can be converted to CSV format for use in programs like Excel.

A trial version of this software program can be downloaded from the following URL:

<http://www.yokogawa.com/tm/Bu/700919/>

Further details are available at the YOKOGAWA web site.

Main Unit Specifications

Basic Specifications


● Input Type	Plug-in module (Each unit has a built-in A/D converter)
Slots	8
Logic inputs	16 (8 bits × 2)
● Horizontal Maximum record length	2.5 MW/CH, 50 MW total (standard) 10 MW/CH, 250 MW total (with /M1 option) 25 MW/CH, 500 MW total (with /M2 option) 50 MW/CH, 1 GW total (with /M3 option)
Time axis accuracy	±0.005%
Sweep time	500 ns to 5 sec/div (in steps of 1, 2, or 5), 10 sec/div, 20 sec/div, 30 sec/div 3, 4, 6, 8, 10, 20, 30 sec/div 1 to 10 min/div (1 min steps), 12 min/div, 15 min/div, 30 min/div 1 to 10 h/div (1 h steps), 12 h/div 1 day/div, 2 days/div, 3 days/div
● Acquisition modes	Maximum sampling rate: 10 MS/s Holds peak value at maximum sampling rate, regardless of time/div setting Increases A/D resolution up to 4 bits (up to 16 bits) Number of averaging: 2 to 65,536 (2 ¹⁶ steps) 100 msec/div or less
Normal Envelope	
Box average	
Averaging	
Roll	

● Triggers	AUTO, AUTO LEVEL, NORMAL, SINGLE, SINGLE (N), LOG 0 to 100% (in 0.1% step)
Modes	CH1 to CH16, DSP1 to DSP6, LINE, EXT, LOGIC_A, LOGIC_B, TIME
Pretrigger	CH1 to CH16, DSP1 to DSP6: Rise, fall, rise-fall
Simple trigger source	EXT (external trigger input), LOGIC_A, LOGIC_B: Rise, fall
Slope selection	Time: Date (year/month/date), hour (hours/minutes), time interval (1 minute to 24 hours)
Enhanced trigger source	CH1 to CH16, LOGIC_A, LOGIC_B
Enhanced trigger type	A → B (N), A delay B, B > Time, B < Time, B Time Out, Period, Window, OR, Edge On A, Wave Window
● Screen updating rate	Maximum 30 screens/sec for a single waveform
1. Typical operating conditions:	Ambient temperature of 23°C ± 5°C, ambient humidity (RH) of 55 ± 10%

Display

Display	10.4-inch color TFT liquid crystal display
Effective screen size	211.2 mm × 158.4 mm
Resolution	800 × 600
Waveform display pixels	650 × 512 (in normal waveform display mode) 750 × 512 (in wide waveform display mode)
Display modes	Split
Zoom	Single, dual, triad, quad, octal Main, Main & Z1, Main & Z1 & Z2, Main & Z2, Z1 Only, Z2 Only, Z1 & Z2 (Z1 and Z2 are

Main Unit Specifications



- abbreviations for zoom area 1 and zoom 2, respectively)
- XY Single Mode (X is fixed, Y is set by user), Quad Mode (XY1, XY2, XY3, XY4)
- Accumulation PERSIST Overlays in one color.
1. The LCD may contain some pixels that are always off or always on. In addition, brightness may vary due to the characteristics of the liquid crystal display. This is not an indication of any problem with the display.

Recorder

- Built-in printer
 - Printing method Thermal line-dot printing
 - Paper width 112 mm
 - Effective recording width 104 mm
 - Functions Screen printing, long printing
- Real-time hard drive recording (with /C8 option)
 - Data capacity 1 GW (for one time record)
 - Maximum sampling rate 100 kS/s (using 1 channel)

DualCapture

This function captures the same waveform data at two different sampling rates.

- Main (low-speed) maximum sampling rate
 - Roll mode area at 100 kS/s
- Sub (high-speed) maximum sampling rate
 - 10 MS/s
- Main maximum memory length
 - 100 MW (with /M3 option)
- Sub memory length
 - 10 kW (fixed)
- Sub maximum number of captured screens
 - 100

Analysis Functions

- Channel-to-channel calculation function
 - Definable math waveforms 8
 - Calculable record length
 - 800 kW (using MATH1 only)
 - 100 kW (using MATH1 through MATH8)
- Standard operators
 - Addition, subtraction, multiplication, division, binary conversion, phase shifting, FFT
 - PS (Power Spectrum)
 - Number of points 1000, 2000, 10,000
 - Window functions Rectangular, Hanning, Flat-Top
- User-defined math function (with /G2 option)
 - Operators
 - ABS, SQR, LOG, EXP, NEG, SIN, COS, TAN, ATAN, PH, DIF, DDIF, INTG, BIN, P2, P3, F1, F2, FV, PWHH, PWHL, PWLH, PWLL, PWXX, FILT1, FILT2, HLTB, MEAN, MAG, LOGMAG, PHASE, REAL, IMAG
 - FFT types
 - LS, PS, PSD, CS, TF, CH
 - Number of points 1000, 2000, 10,000
 - Window functions Rectangular, Hanning, Flat-Top

DSP Channel Function (with the /G3 option)

- DSP channels
 - 6
 - Maximum sampling rate¹
 - 100 kS/s (when exceeding 100 kS/s, the sampling rate is resampled at 100 kS/s)
 - Operators
 - Calculation between channels (addition, subtraction, multiplication, division), differentiation (w/ LPF), integration, digital filtering (LPF/HPF/BPF, FIR type, IIR type, variable cutoff frequency)
 - Digital filtering cutoff setting range
 - IIR type: 0.2 to 30% of sampling frequency
 - FIR type: 2 to 30% of sampling frequency
 - Calculation delay
 - 4 sampling + digital filtering calculation delay
1. When the DSP channel is ON, the maximum sampling rate of the analog channel is 5 MS/s.

Waveform Measurement Functions

- Cursors
 - Types
 - Horizontal Two cursors
 - Vertical Two cursors
 - Marker Four markers
 - Degree Cursor measurement on the horizontal axis is displayed in a degree. (for TY display only)
 - H&V (for XY display only)
- Automatic measurement of waveform parameters
 - Maximum number of measured parameters
 - 24
 - Measured parameters
 - P-P, Max, Min, High, Low, Avg, Rms, Amp, StdDev, +Oshot, -Oshot, Rise, Fall, Freq, Period, +Duty, +Width, -Width, Pulse Burst1, Burst2, Avg Freq, Avg Period, Delay, Int1TY, Int2TY, Int1XY, Int2XY
- Cycle statistical process
 - Maximum number of cycles
 - 24,000 (for one parameter)
 - Maximum total number of parameters
 - 24,000 (total measured results)
 - Statistical values
 - Maximum/minimum/average/standard deviations/number of samples
 - Maximum measurement range
 - 10 MW
- Search function
 - Edge, voice, auto scroll
- History search function
 - Zone
- GO/NO-GO Judgment
 - Parameter: Make judgments using combinations of 16 waveform parameters.
 - Zone: Make judgments using combination of up to 6 waveform zones (AND, OR)
 - Actions: One or more of the followings: outputs screen image data, saves waveform data, sounds a buzzer, sends email

Screen Data Output (Printer)

- Destinations
 - Select built-in printer, external USB printer, or network printer (with /C10 option)
- Formats
 - Normal Outputs hard copy of screen shot
 - Long Zooms displayed waveform along time axis and outputs (The zoom factor differs depending on the time/div.)

Screen Data Output (Image Saving)

- Destinations
 - Installed drive (floppy drive, Zip® drive, or PC card), external SCSI drive, internal hard drive (with /C8 option), network drive (with /C10 option)
- Formats
 - PNG, JPEG, BMP, PostScript

External I/O

- LOGIC input specifications
 - Input points 8 bits × 2
 - Maximum sampling rate 10 MS/s
 - Compatible probes 8-bit non-isolated (700986), 8-bit isolated (700987)
- EXT TRIG IN/EXT TRIG OUT
 - Connector RCA pin jack
 - Input/output level TTL (0 to 5 V)
- EXT Clock IN
 - Connector RCA pin jack
 - Input level TTL (0 to 5 V)
 - Input frequency Up to 1 MHz (for module 701250/701251/701255), up to 100 kHz (for module 701260/701270/701271, DSP-CH), up to 500 Hz (for module 701265)
- Communication interfaces
 - GP-IB, USB peripheral equipment jacks (USB keyboards and USB printers), USB (complies with Rev. 1.1, for connection to PC), Ethernet (complies with 100BASE-TX and 10BASE-T; with /C10 option), serial (RS232), and SCSI
- GO/NO-GO I/O
 - Connector type Modular jack (RJ12)
 - I/O level TTL (0 to 5 V)
- Probe power terminal (with /P4 option)
 - Maximum number of probes powered 4
 - Compatible probes Current probes 700937 (15 A peak) and 701930 (150 Arms)
 - Maximum number of current probes that can be used at one time 4 (for module 700937), 2 (for module 701930)

Voice Memo Function

- Voice memo
 - Record (roll mode)
 - Flexible: Multiple recording (min. 3 sec up to 100 sec, total 100 sec)
 - Fixed: Select from 5 sec × 20, 10 sec × 10, 20 sec × 5, 25 sec × 4, 50 sec × 2, 100 sec × 1
 - Save
 - Save together with waveform data (binary, same file)
 - Playback
 - Voice data loaded on the main unit is outputted from microphone terminal and speaker output terminal (GO/NO-GO)
- Voice comment
 - Record 3 to 100 sec
 - Save When image saving is executed (separate file)
 - Playback Playback from microphone terminal and speaker output terminal (GO/NO-GO)

Acquisition Memory Backup

- Batteries
 - Four AA alkaline dry cells (AA/R6) (JIS and IEC type name: LR6) or four nickel metal-hydrate rechargeable batteries
 - Backed up data
 - Acquisition memory, waveform data, voice data
 - Backup duration (reference value)²
 - Approximately 10 hours (with /M3 option)
2. Actual backup duration will vary according to the usage conditions.

Media Drives

- Internal media drives
 - Floppy drive, Zip® drive, or PC card (choose one), and 20 GB hard drive (with /C8 option)

General Specifications

- Rated supply voltage
 - 100 to 120 VAC/200 to 240 VAC (automatically switched)
- Rated supply frequency
 - 50/60 Hz
- Power consumed
 - Approximately 200 VA-MAX
- Maximum voltage
 - 1500 VAC for one minute across power supply and ground
- Insulating resistance
 - 10 MΩ or greater at 500 VDC across power supply and ground
- Exterior
 - 355 × 250 × 180 mm (WHD), excluding knobs and protrusions
- Weight
 - Approx. 6.6 kg (main unit with full options, including M3, C8, C10, and P4)
 - Approx. 9 kg (main unit and eight 701250 modules)
- Operating temperature range
 - 5 to 40°C

For detailed specifications, go to the following URL: <http://www.yokogawa.com/tm/Bu/DL750/>

Plug-In Module Specifications

High-Speed 10 MS/s 12-Bit Isolation Module (701250)

Input channels	2
Input couplings	AC, DC, GND
Maximum sampling rate	10 MS/s
A/D conversion resolution	12 bits (150 LSB/div)
Input type	Isolated unbalanced
Frequency range (–3 dB) ¹	DC, up to 3 MHz
Input range	(10:1) 50 mV/div to 200 V/div (in steps of 1, 2, or 5), (1:1) 5 mV/div to 20 V/div (in steps of 1, 2, or 5)
Effective measurement range	20 div (display range: 10 div)
DC offset	±5 div
Maximum input voltage (1 kHz or less)	600 V (DC + ACpeak)
In combination with 700929 (10:1) ²	250 V (DC + ACpeak)
Direct input (1:1) ^{6, 10}	400 Vrms (CAT I), 300 Vrms (CAT II)
Maximum allowable in-phase voltage	400 Vrms (CAT I), 300 Vrms (CAT II)
In combination with 701919 (10:1) ³	400 Vrms (CAT I), 300 Vrms (CAT II)
Main unit only (1:1) ¹¹	42 V (DC + ACpeak) (CAT I and CAT II, 30 Vrms)
DC accuracy ¹	±(0.5% of 10 div)
Input impedance	1 MΩ ± 1%, approx. 35 pF
Connector type	Isolated type BNC connector
Input filter	OFF, 500 Hz, 5 kHz, 50 kHz, 500 kHz
Temperature coefficient	
Zero point	±(0.05% of 10 div)/°C (typical value)
Gain	±(0.02% of 10 div)/°C (typical value)

High-Speed 1 MS/s 16-Bit Isolation Module (701251)

Input channels	2
Input couplings	AC, DC, GND
Maximum sampling rate	1 MS/s
A/D conversion resolution	16 bits (2400 LSB/div)
Input type	Isolated unbalanced
Frequency range (–3 dB) ¹	DC, up to 300 kHz (20 V/div to 5 mV/div)
Input range	(10:1) 10 mV/div to 200 V/div (in steps of 1, 2, or 5) (1:1) 1 mV/div to 20 V/div (in steps of 1, 2, or 5)
Maximum input voltage (1 kHz or less)	600 V (DC + ACpeak)
In combination with 700929 (10:1) ²	140 V (DC + ACpeak)
Direct input (1:1) ^{6, 10}	400 Vrms (CAT I), 300 Vrms (CAT II)
Maximum allowable in-phase voltage	400 Vrms (CAT I), 300 Vrms (CAT II)
In combination with 701901+701954 (1:1) ⁹	42 V (DC + ACpeak) (CAT I and CAT II, 30 Vrms)
Main unit only (1:1) ¹¹	42 V (DC + ACpeak) (CAT I and CAT II, 30 Vrms)
DC accuracy ¹	±(0.25% of 10 div)
5 mV/div to 20 V/div	±(0.3% of 10 div)
2 mV/div	±(0.5% of 10 div)
1 mV/div	±(0.5% of 10 div)
Input impedance	1 MΩ ± 1%, approx. 35 pF
Connector type	Isolated type BNC connector
Input filter	OFF, 400 Hz, 4 kHz, 40 kHz
Temperature coefficient	
Zero point	5 mV/div to 20 V/div: ±(0.02% of 10 div)/°C (typical value) 2 mV/div: ±(0.05% of 10 div)/°C (typical value) 1 mV/div: ±(0.10% of 10 div)/°C (typical value)
Gain	1 mV/div to 20 V/div: ±(0.02% of 10 div)/°C (typical value)

High-Speed 10 MS/s 12-Bit Non-Isolation Module (701255)

Input channels	2
Input couplings	AC, DC, GND
Maximum sampling rate	10 MS/s
A/D conversion resolution	12 bits (150 LSB/div)
Input type	Non-isolated unbalanced
Frequency range (–3 dB) ¹	DC, up to 3 MHz
Input range	(10:1) 50 mV/div to 200 V/div (in steps of 1, 2, or 5) (1:1) 5 mV/div to 20 V/div (in steps of 1, 2, or 5)
Effective measurement range	20 div (display range 10 div)
DC offset	±5 div
Maximum input voltage (1 kHz or less)	600 V (DC + ACpeak)
In combination with 701940 (10:1)	250 V (DC + ACpeak)
Direct input (1:1)	±(0.5% of 10 div)
DC accuracy ¹	±(0.5% of 10 div)
Input impedance	1 MΩ ± 1%, approx. 35 pF
Connector type	Metal type BNC connector
Input filter	OFF, 500 Hz, 5 kHz, 50 kHz, 500 kHz
Temperature coefficient	
Zero point	±(0.05% of 10 div)/°C (typical value)
Gain	±(0.02% of 10 div)/°C (typical value)
Adaptive passive probe (10:1)	701940

High-Voltage 100 kS/s 16-Bit Isolation Module (with RMS) (701260)

Input channels	2
Input couplings	AC, DC, GND, AC-RMS, DC-RMS
Maximum sampling rate	100 kS/s
A/D conversion resolution	16 bits (2400 LSB/div)
Input type	Isolated unbalanced
Frequency range (–3 dB) ¹	Waveform measurement mode DC, up to 40 kHz RMS measurement mode DC, 40 Hz to 10 kHz
Input range	(10:1) 200 mV/div to 2000 V/div (in steps of 1, 2, or 5) (1:1) 20 mV/div to 200 V/div (in steps of 1, 2, or 5)
Effective measurement range	20 div (display range 10 div)
DC offset	±5 div
Maximum input voltage (1 kHz or less)	1000 V (DC + ACpeak)
In combination with 700929 (10:1) ²	850 V (DC + ACpeak)
In combination with 701901+701954 (1:1) ⁶	850 V (DC + ACpeak)
Maximum allowable in-phase voltage	H side: 1000 Vrms (CAT II) ⁴ , L side: 400 Vrms (CAT II) ⁵

In combination with 701901+701954 (1:1)

Direct input (when using a cable which doesn't comply with the safety standard)	H side: 700 Vrms (CAT II) ⁷ , L side: 400 Vrms (CAT II) ⁸ H/L sides: 30 Vrms (42 V DC + ACpeak) ¹¹
DC accuracy (waveform measurement mode) ¹	±(0.25% of 10 div)
DC accuracy (RMS measurement mode) ¹	±(1.0% of 10 div)
AC accuracy (RMS measurement mode) ¹	±(1.5% of 10 div)
Sine wave input	±(1.5% of 10 div)
Crest factor of 2 or less	±(2.0% of 10 div)
Crest factor of 3 or less	±(3.0% of 10 div)
Input impedance	1 MΩ ± 1%, approx. 35 pF
Connector type	Isolated type BNC connector
Input filter	OFF, 100 Hz, 1 kHz, 10 kHz
Temperature coefficient (waveform measurement mode)	
Zero point	±(0.02% of 10 div)/°C (typical value)
Gain	±(0.02% of 10 div)/°C (typical value)
Response time (RMS mode)	
Rise (0 to 90% of 10 div)	100 ms (typical)
Fall (100 to 10% of 10 div)	250 ms (typical)
Crest factor (only at RMS measurement)	3 or less

* Please use 701901 (1:1 safety adaptor lead) or 700929 (10:1 safety probe), which complies with the safety standard, for high-voltage input.

* It is very dangerous to use cables that do not comply with the safety standard.

Temperature/High-Precision Voltage Module (701265)

Input channels	2	
Input couplings	TC (thermocouple), DC, GND	
Input type	Isolated unbalanced	
Applicable sensors (input coupling: TC)	K, E, J, T, L, U, N, R, S, B, W, iron-doped gold/chromel	
Data updating rate	500 Hz	
Frequency range (-3 dB) ¹	DC, up to 100 Hz	
Voltage accuracy ¹ (at voltage mode)	±(0.08% of 10 div + 2 μV)	
Temperature measurement accuracy ^{1, 12}		
Type	Measured range	Accuracy
K	-200°C to 1300°C	±(0.1% of reading + 1.5°C)
E	-200°C to 800°C	except -200 to 0°C:
J	-200°C to 1100°C	±(0.2% of reading + 1.5°C)
T	-200°C to 400°C	
L	-200°C to 900°C	
U	-200°C to 400°C	
N	0°C to 1300°C	
R, S	0°C to 1700°C	±(0.1% of reading + 3°C) except 0 to 200°C: ±8°C 200 to 800°C: ±5°C
B	0°C to 1800°C	±(0.1% of reading + 2°C), except 400 to 700°C: ±8°C Effective range: 400 to 1800°C
W	0°C to 2300°C	±(0.1% of reading + 3°C)
Iron-doped gold/chromel	0 to 300 K	0 to 50 K: ±4 K 50 to 300 K: ±2.5 K

Maximum input voltage (1 kHz or less)	42 V (DC + ACpeak) (CAT I and CAT II, 30 Vrms)
Input range (for 10 div display)	100 μV/div to 10 V/div (in steps of 1, 2, or 5)
Input connector	Binding post
Input impedance	Approx. 1 MΩ
Input filter	OFF, 2 Hz, 8 Hz, 30 Hz
Temperature coefficient (for voltage)	
Zero point	±((0.01% of 10 div)/°C + 0.05 μV)/°C (typical value)
Gain	±(0.02% of 10 div)/°C (typical value)

Strain Module (NDIS) (701270)

Input channels	2
Input types	DC bridge input (automatic balancing), balanced differential input, DC amplifier (floating)
Automatic balancing method	Electronic auto-balance
Automatic balancing range	±10,000 μSTR (1 gauge method)
Bridge voltages	Select from 2 V, 5 V, or 10 V
Gauge resistances	120 to 1000 Ω (bridge voltage of 2 V) 350 to 1000 Ω (bridge voltage of 2/5/10 V) 1.90 to 2.20 (variable in steps of 0.01)
Gauge rate	16 bits (4800 LSB/div: Upper= +FS, Lower=–FS)
A/D resolution	100 kS/s
Maximum sampling rate	Frequency range (–3 dB) ¹ DC, up to 20 kHz
DC accuracy ¹	±(0.5% of FS + 5 μSTR)
Measurement range/measurable range	
Measurement range (FS)	Measurable range (–FS to +FS)
500 μSTR	–500 μSTR to 500 μSTR
1000 μSTR	–1000 μSTR to 1000 μSTR
2000 μSTR	–2000 μSTR to 2000 μSTR
5000 μSTR	–5000 μSTR to 5000 μSTR
10,000 μSTR	–10,000 μSTR to 10,000 μSTR
20,000 μSTR	–20,000 μSTR to 20,000 μSTR
mV/V range support	mV/V range = 0.5 × (μSTR range/1000)
Maximum allowable input voltage (1 kHz or less)	10 V (DC + ACpeak)
Maximum allowable in-phase voltage	42 V (DC + ACpeak) (CAT I and CAT II, 30 Vrms)
Temperature coefficient	
Zero point	±5 μSTR/°C (typical value)
Gain	±(0.02% of FS)/°C (typical value)
Internal filter	OFF, 1 kHz, 100 Hz, 10 Hz
Input connector	NDIS standard
Accessory (a set of connector shell for solder connection)	2 NDIS connectors (A1002JC)
Recommended bridge head (NDIS type) (sold separately)	701955 (bridge resistance of 120 Ω) (w/ 5 m cable) 701956 (bridge resistance of 350 Ω) (w/ 5 m cable)

Plug-In Module Specifications

Strain Module (DSUB, Shunt-cal) (701271)

Input channels	2
Input types	DC bridge input (automatic balancing), balanced differential input, DC amplifier (floating)
Automatic balancing method	Electronic auto-balance
Automatic balancing range	$\pm 10,000 \mu\text{STR}$ (1 gauge method)
Bridge voltages	Select from 2 V, 5 V, or 10 V
Gauge resistances	120 to 1000 Ω (bridge voltage of 2 V) 350 to 1000 Ω (bridge voltage of 2.5/10 V) 1.90 to 2.20 (variable in steps of 0.01)
Gauge rate	16 bits (4800 LSB/div: Upper=+FS, Lower=-FS)
A/D resolution	100 kS/s
Maximum sampling rate	DC, up to 20 kHz
Frequency range (-3 dB) ¹	$\pm(0.5\% \text{ of FS} + 5 \mu\text{STR})$
DC accuracy ¹	
Measurement range/measurable range	

Measurement range (FS)	Measurable range (-FS to +FS)
500 μSTR	-500 μSTR to 500 μSTR
1000 μSTR	-1000 μSTR to 1000 μSTR
2000 μSTR	-2000 μSTR to 2000 μSTR
5000 μSTR	-5000 μSTR to 5000 μSTR
10,000 μSTR	-10,000 μSTR to 10,000 μSTR
20,000 μSTR	-20,000 μSTR to 20,000 μSTR


mV/V range support	mV/V range = $0.5 \times (\mu\text{STR range}/1000)$
Maximum allowable input voltage (1 kHz or less)	10 V (DC + ACpeak)
Maximum allowable in-phase voltage	42 V (DC + ACpeak) (CAT I and CAT II, 30 Vrms)
Temperature coefficient	
Zero point	$\pm 5 \mu\text{STR}/^\circ\text{C}$ (typical value)
Gain	$\pm(0.02\% \text{ of FS})/^\circ\text{C}$ (typical value)
Internal filter	OFF, 1 kHz, 100 Hz, 10 Hz
Input connector	DSUB
Accessory (a set of connector shell for solder connection)	2 DSUB connectors
Recommended bridge head (DSUB, Shunt-cal) (sold separately)	701957 (bridge resistance of 120 Ω) (w/ 5 m cable) 701958 (bridge resistance of 350 Ω) (w/ 5 m cable)

High-Speed Logic Probe (700986)

Number of inputs	8
Input types	Non-isolated (common ground for all bits; logic module and bits share common ground)
Maximum input voltage (1 kHz or less) (between probe tip and case ground)	42 V (DC + ACpeak) (CAT I and II, 30 Vrms)
Response time	1 μs or less
Input impedance	Approximately 100 k Ω
Threshold level	Approximately 1.4 V

Isolated Logic Probe (700987)


Number of inputs	8
Input types	Isolated (all individual bits are isolated)
Input connector	Safety connector (banana plug) $\times 8$
Input switching capability	AC/DC input switching for each bit
Applicable input ranges	DC input H/L detection for 10 V DC to 250 V DC AC input H/L detection (50/60 Hz) for 80 V AC to 250 V AC
Threshold levels	DC input 6 V DC $\pm 50\%$ AC input 50 V AC $\pm 50\%$
Response times	DC input 1 ms or less AC input 20 ms or less
Maximum input voltage (1 kHz or less) (between H and L of each bit)	250 Vrms (CAT I and II)
Maximum allowable in-phase voltage	250 Vrms (CAT I and II)
Maximum allowable voltage between bits	250 Vrms (CAT I and II)
Input impedance	Approximately 100 k Ω
1. Under reference operating conditions (ambient temperature of $23^\circ\text{C} \pm 5^\circ\text{C}$, ambient humidity (RH) of $55\% \pm 10\%$; after calibration following 30-minute warmup period)	
12. Does not include reference contact compensation accuracy.	

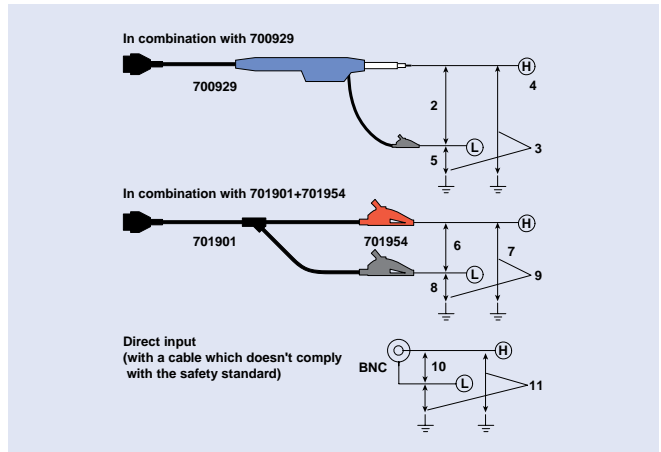

Warning

Do not exceed the maximum input voltage, withstand voltage, or surge current. In order to prevent electric shock, be sure to ground the main unit. In order to prevent electric shock, be sure to tighten the module's screws. Electrical protective functions and mechanical protective functions will not be effective.

Accessories




Isolated probe (700929)



Passive probe for DL750 (701940)



Safety adaptor lead (701901)



Alligator clip (701954)
Dolphin type, red/black



Differential probe (700924)
ratio: 1/100, 1/1000 (variable)
Max. differential allowable voltage: ± 1400 V



High-speed logic probe (700986)




Isolated logic probe (700987)



Bridge head (701955 & 701956)
NDIS-120 Ω /350 Ω , Enhanced Shield



Conversion adaptor (366928)
For external trigger and external clock




Earphone Mic (w/ PUSH switch) (701951)
For the voice memo function



50 MHz bandwidth current probe (700937)
Input range: 15 Apeak



10 MHz bandwidth current probe (701930)
Input range: 150 Arms

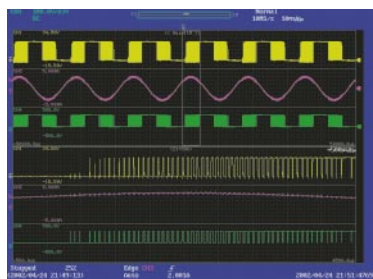

Measuring inverter I/O signals and control signals using the 10 MS/s high-speed 12-bit isolated module, current probe 700937 and isolated probe 700929. The model 700937 can be powered when the /P4 option is selected.

DL750 Model Number and Suffix Codes

Model/Options	Suffix Code	Description
701210		DL750 ScopeCorder ¹
Power cable	-D	UL and CSA standard
	-F	VDE standard
	-Q	BS standard
	-R	SAA standard
Internal media drive	-J1	Floppy drive ²
	-J2	Zip [®] drive ²
	-J3	PC card interface ²
Help language	-HE	English and Japanese online help ³
	-HJ	Japanese and English online help ³
Memory expansion	/M1	Memory expansion to 10 MW/CH ⁴
	/M2	Memory expansion to 25 MW/CH ⁴
	/M3	Memory expansion to 50 MW/CH ⁴
Others	/C8	Internal 20 GB hard drive (FAT32)
	/C10	Ethernet interface
	/G2	User-defined math function
	/G3	DSP channel function
	/P4	Probe power (4-output)

1. Plug-in modules are not included. 2. Choose one. 3. Choose one. 4. Choose one.

Standard Accessories


Product	Order Q'ty
Power cable	1
User's manuals (one set)	1
Transparent front cover	1
Printer roll paper (10 meters)	3
Cover panels (for blank module slots)	8
Rubber feet (four per set)	1
Soft case (for storing accessories)	1

Plug-In Module Model Numbers¹

Model No.	Description
701250	High-speed 10 MS/s 12-bit isolation module (2 CH)
701251	High-speed 1 MS/s 16-bit isolation module (2 CH)
701255	High-speed 10 MS/s 12-bit non-isolation module (2 CH)
701260	High-voltage 100 kS/s 16-bit isolation module (with RMS) (2 CH)
701265	Temperature/high-precision voltage module (2 CH)
701270	Strain module (NDIS, 2 CH)
701271	Strain module (DSUB, Shunt-cal, 2 CH)

1. Probes are not included with any modules. Probes must be purchased separately as accessories if required.


Exterior Dimensions

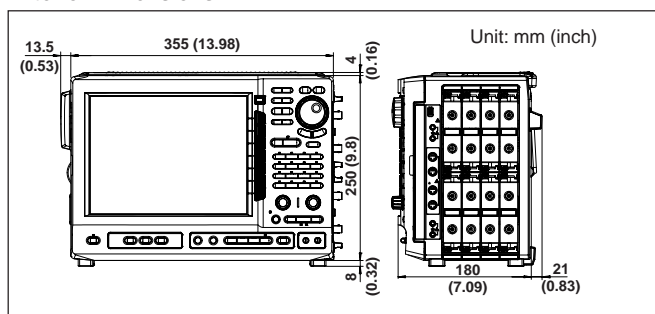

Probes, Cables, and Converters

Product	Model No.	Description
Isolated probe	700929	10000 Vrms-CAT II for 701250, 701251, and 701260 (10:1)
1:1 BNC safety adapter lead (with combination with followings)	701901	1000 Vrms-CAT II for 701250, 701251, 701260 (10:1)
Large alligator clip (dolphin type)	701954	1000 Vrms-CAT II (2 per set)
Alligator adapter (rated voltage: 1000 V)	758929	1000 Vrms-CAT II (2 per set)
Alligator adapter (rated voltage: 300 V)	758922	300 Vrms-CAT II (2 per set)
Folk terminal adaptor set	758921	1000 Vrms-CAT II (2 per set) (for 4-mm screw terminal)
Passive probe for DL750 (10:1)	701940	Non-isolated 600 Vpk (701255) 42 V or less (others)
BNC alligator clip	366926	Non-isolated 42 V or less for 701250/51/55 (1:1)
Current probe	700937	15 Apeak, DC to 50 MHz, support probe power
Current probe	701930	150 Arms, DC to 10 MHz, support probe power
Differential probe	700924	1400 pk, 1000 Vrms-CAT II
Bridge head (NDIS 120 Ω/350 Ω)	701955/56	With 5 m cable
Bridge head (DSUB shunt-CAL 120 Ω/350 Ω)	701957/58	With 5 m cable
GO/NO-GO cable	366973	GO/NO-GO input/output, start input
Earphone-Mic (w/ PUSH switch)	701951	For voice memo function
Speaker cable (for voice memo)	701952	For connection to external speakers
BNC adaptor	758924	500 Vrms-CAT II, BNC-banana conversion
Printer roll paper	B9988AE	10-meter roll × 10
High-speed logic probe	700986	8-bit, non-isolated, response speed: 1 μs
Isolated logic probe	700987	8-bit, each channel isolated, response speed: 20 ms (for AC)
Measurement lead set (75 cm)	758917	Isolated logic measurement lead (2 per set) Alligator clip is required separately.
Conversion adaptor	366928	BNC (jack)-RCA (plug) conversion
Safety BNC cable (1 meter)	701902	1000 Vrms-CAT II (BNC-BNC)
Safety BNC cable (2 meters)	701903	1000 Vrms-CAT II (BNC-BNC)

Related Products

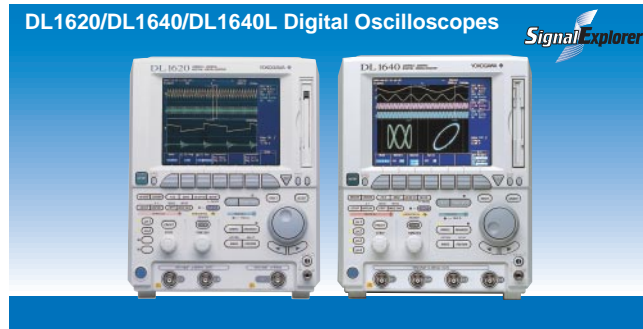

Yokogawa's Approach to Preserving the Global Environment

- Yokogawa's products are developed and produced in facilities that have received ISO14001 approval.
- In order to protect the global environment, Yokogawa's electrical products are designed in accordance with Yokogawa's Environmentally Friendly Product Design Guidelines and Product Design Assessment Criteria.

Signal Explorer is a registered trademark of YOKOGAWA Electric Corporation.
Microsoft, MS-DOS, and Windows are either trademarks or registered trademarks of Microsoft Corporation in the US and/or other countries.
Ethernet is a registered trademark of Xerox Corporation.
Zip is a trademark or registered trademark of Iomega Corporation in the US and/or other countries.
Other company names and product names appearing in this document are trademarks or registered trademarks of their respective companies.

NOTICE

- Before operating the product, read the user's manual thoroughly for proper and safe operation.
- If this product is for use with a system requiring safeguards that directly involve personnel safety, please contact the Yokogawa sales offices.

YOKOGAWA

YOKOGAWA ELECTRIC CORPORATION

Test and Measurement Business Div./Phone: (81)-55-243-0313, Fax: (81)-55-243-0396

E-mail: tm@csv.yokogawa.co.jp

YOKOGAWA CORPORATION OF AMERICA

YOKOGAWA EUROPE B.V.

YOKOGAWA ENGINEERING ASIA PTE. LTD

Phone: (1)-770-253-7000, Fax: (1)-770-251-2088

Phone: (31)-33-4641806, Fax: (31)-33-4641807

Phone: (65)-62419933, Fax: (65)-62412606

Subject to change without notice.

[Ed : 02/b] Copyright ©2002

Printed in Japan, 302(YG)