


# SL1400

## ScopeCorder LITE

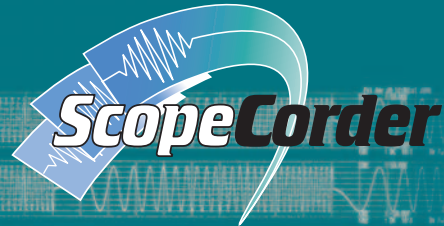

### Easily & Quickly Save Data to Memory or Paper

- A perfect fit for manufacturing and maintenance departments
- Intuitive key names and menus for easy operation
- Easily store data both on paper and in external memory media
- Record data to USB or PC card devices or directly to the optional internal HDD
- Up to 16 analog slots +16 logic inputs

**10MS/s**  
High Sample Rate

**100 $\mu$ s to 30 days**  
Data Record Period

**3-Year Warranty**



# Easily & Quickly Save Data to Memory or Paper

← 200mm (=1600 dot) →

**ScopeCorder**

Voltage Axis: A4 Size  
200 mm = 1600 dot  
Time Axis: A4 Size  
300 mm = 3000 dot  
Maximum Chart Speed:  
20mm/s



## A perfect fit for manufacturing and maintenance departments!

### The SL1400 Key Application Areas

- ☐ Maintenance (steel plants, power plants, co-generation systems)
- ☐ Heavy machinery (industrial machinery, robotics, semiconductor manufacturing equipment)
- ☐ Multichannel on-site observations (automobiles, automobile parts)
- ☐ On-board testing for railroads and other vehicles
- ☐ Power supply quality monitoring (power line monitoring)

### Intuitive key names and menus for easy operation

#### Menus

In addition to sample rate and trigger settings, you can enter settings for functions such as waveform computation, printing, image output, communication, remote control, and system configuration.

#### Display

Enter screen settings including vertical/horizontal axis parameters, divisions, scale values, and labels.

#### Modes

Select from three modes: Chart recorder, X-Y recorder, and Memory.

#### Start/Stop

Manual starting/stopping of signal observation.

#### Chart Speed

Set the chart speed when operating in chart recorder mode.

#### Channel/All Channel Menus

Enter detailed settings for each channel including: coupling, range, position, and bandwidth limit filter. Pressing ALL CH lets you view and enter settings for all channels on a single screen.




#### Range/Position

The vertical axis range and time axis position of the signal under test can be easily modified. Pressing the Fine buttons above the knobs enables fine adjustments.

### Simple measurement Set up

Store data in memory and print it in just three steps

#### 1. Set the Range and Position

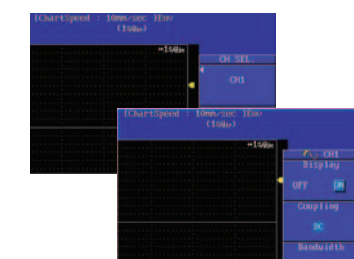


CH key → select channel  
RANGE and POSITION knob

#### 2. Set the Sample Rate/Record Time or Chart Speed



MENU key → ACQ menu  
CHART SPEED key

#### 3. Measurement Start



START/STOP key

### Data Storage to External Memory Media



### Print Output (Chart Recorder Mode)





## Long-Term Measurements with Large Capacity Memory (50 MW Total)

Sample Rate	Using 16ch	Using 2ch
10MS/s	0.2 sec	2 sec
1MS/s	2 sec	20 sec
100kS/s	20 sec	200 sec
10kS/s	200 sec	30 min.
1kS/s	30 min.	5 hours
100S/s	5 hours	50 hours
5S/s	5 days	30 days

## Real-Time Hard Drive Recording (with the /C8 Option)

With the optional internal hard drive, you can record measurements to the hard drive in real time.

This makes it easy to manage and analyze data using a PC.

Maximum data capacity:  
1 GW

Maximum sampling rate:  
100 kS/s  
(using 1 channel only)




## PDF Output for Printing A4-Sized Reports

### Color PDF Output

When performing on-site measurements, you can print out the data and hand-write memos on the paper. Since the SL1400 simultaneously stores data to internal memory while printing, you can keep electronic and hard copy records with just a single action. (Remember that with thermal-sensible paper, it is vital to make photocopies for long-term preservation.)

The SL1400 allows you to export results to files in PDF format, making it easy to save data for long periods of time, transfer the data to distant locations, or load them onto a PC. It is also easy to create reports since waveform data can be converted to an A4-size layout.



## Memory Backup Function

This function backs up about 150 hours of data saved to the acquisition memory immediately prior to power loss. Memory backup helps you avoid losing important data even if the power supply is unstable and gets cut off. (Backup time varies according to the usage environment. Four AA batteries are required for memory backup.)



## Complete Connectivity


- 
- GP-IB
  - A4 Size High Resolution Thermal Printer
  - Ethernet (optional)  
Supports 100BASE-TX and 10BASE-T
  - Video Out (SVGA)  
Outputs a video signal so waveform can be viewed on an external monitor
  - SERIAL (RS232)
  - Logic input (8 bits × 2)  
Logic Probe 700986/  
700987, or 702911/702912
  - External trigger input
  - Internal hard drive (optional):  
40 GB (FAT32)
  - Drive  
• PC card (Flash ATA card, Compact Flash, Microdrive) \*  
(up to 5 GB)
  - SCSI interface
  - USB—PC jack
  - USB peripheral jacks \*  
(complies with USB Rev. 1.1) For use with a USB mouse/keyboard/printer
  - External start/stop Input
  - Trigger output/external clock input (switch)  
Outputs TTL level trigger signals  
External clocks as fast as 1 MHz can be used (with 701250 or 701251).

\* Ask for information on compatible products.

## USB

### Connecting to a PC

Save as with for RS232 and GB-IB, you can write your own custom programs in Visual C++ 6.0 or Visual Basic 6.0 and control the SL1400 through a USB interface. PC communications are made easy with Xviewer and Wirepuller software programs.



### Connecting USB Peripheral Equipment

USB keyboards, USB mouse and USB printers can be directly connected to the SL1400.

## Ethernet (Optional)

### Connecting to a PC

#### ■ Web Server and FTP Server


The SL1400 has a variety of server functions that let you perform remote controls or download waveform data and screen images onto a PC. You can also access the SL1400 using Internet Explorer. Same as with RS232 and GB-IB, you can write your own custom programs in Visual C++ 6.0 or Visual Basic 6.0 and control the SL1400 through an Ethernet interface.



## A Wide Range of Trigger Functions for Accurately Capturing a Variety of Waveforms

Having a wide range of triggers is of course very useful for obtaining the desired waveforms. In addition, the GUI menu makes setting trigger conditions easy and intuitive.

### Simple and Enhanced Triggers

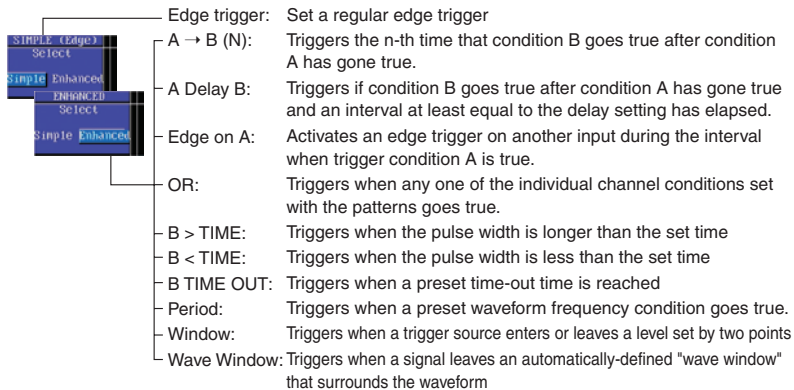

### Action-On Trigger

#### Automatically Save Measured Data

When this trigger is activated, the SL1400 performs a specified action each time a waveform is captured and displayed on the screen. This feature is useful for saving data automatically and reliably (e.g., for data collection in automated, continuous tests).

### Manual Trigger

#### A Trigger Can Be Activated with the Press of a Button.


With this feature, a trigger can be executed whenever you like, independent from the set trigger conditions.



### Wave Window Trigger

#### Automatically Triggers on Abnormalities in Power Supply Waveforms

This function comes standard with the SL1400 and enable triggering on power supply waveforms. In addition to traditional power supply troubles, such as sudden outages, sags, and surges, you can make efficient real time observations of frequency fluctuations and voltage drops. This trigger activates when a signal exceeds the allowable values determined by comparing a defined waveform (wave window) with an actual waveform in real time. Comparative waveforms can be automatically produced in real time based on measured waveforms. Detection on all 16 analog channels is available (with OR conditions).



## Module Selection

Input	Model No.	Sample Rate / Resolution	Channel Number	Isolation	Maximum Input Voltage	DC Accuracy	Features
Analog Voltage	701250	10MS/s, 12-bit	2	Isolated	600 V *12 250 V *13	± 0.5%	10 MS/s, 12 bit, broad bandwidth (3 MHz), high accuracy (0.5%), high noise immunity
	701251	1MS/s, 16-bit	2	Isolated	600 V *12 140 V *13	± 0.25%	1 MS/s, 16 bit, bandwidth: 300 kHz, high accuracy (0.25%) High sensitivity range (10 mV), low noise (±100 Vtyp), and high noise immunity
	701260	100kS/s, 16-bit	2	Isolated	1000 V *12 850 V *13	± 0.25%	High voltage (direct 850 V input), high accuracy (0.25%), with RMS, and high noise immunity
Temperature	701261/62	100kS/s (Voltage), 500S/s (Temperature)	2	Isolated	42 V	± 0.25% (Voltage)	Universal modules (voltage/temperature), voltage 100 kS/s, 16-bit, temperature 500 S/s Voltage (50 mV to 200 V range), thermocouple (K, E, J, T, L, U, N, R, S, B, W, iron-doped gold/chromel), with AAF (701262)
	701255	10MS/s, 12-bit	2	Non-isolated	600 V *12*14 250 V *13	± 0.5%	10 MS/s, 12-Bit Non-Isolation (non-isolation version of model 701250)
Temperature	701265	500S/s, 16-bit	2	Isolated	42 V	± 0.08% (Voltage)	Both temperature and voltage input, frequency range of 100 Hz, thermocouple (K, E, J, T, L, U, N, R, S, B, W, iron-doped gold/chromel), High accuracy voltage (0.08%), high sensitivity range (1 mV), and low noise (±4μVtyp)
Acceleration	701275	100kS/s, 16-bit	2	Isolated	42 V	± 0.25% (Voltage) ± 0.5% (Acceleration)	Both acceleration and voltage input, built-in anti-aliasing filter Supports built-in amp type acceleration sensors (4 mA/22 V)
Strain	701270	100kS/s, 16-bit	2	Isolated	42 V	± 0.5% (Strain)	Supports strain NDIS, high accuracy (0.5%), 2, 5, 10 V built-in bridge power supply
	701271	100kS/s, 16-bit	2	Isolated	42 V	± 0.5% (Strain)	Supports strain DSUB, high accuracy (0.5%), 2, 5, 10 V built-in bridge power supply, and shunt CAL
Frequency	701280	25kS/s, 16-bit	2	Isolated	420 V *12 42 V *13	± 0.1% (Frequency)	Measurement frequency of 0.01 Hz to 200 kHz, Measured parameters (frequency, rpm, period, duty, power supply frequency, distance, speed)

\*12, When using the 10:1 Isolation Probe (700929). \*13, When using the 1:1 safety adapter lead (701901). \*14, When using the 10:1 passive probe (701940)

# Main Specifications (Main Unit)

\*1 Under standard operating conditions (temperature of 23°C ±5°C, 55% ±10% RH, warm-up of 30 min. or more), after calibration. Recommended calibration period: 1 year.

\*2~\*11 See the figure on page 11 for notes on the maximum input voltage and maximum allowable common mode voltage.

## Basic specifications

Input section	
Type	Plug-in module (A/D converters built in to each unit)
Number of slots	8
Logic input	16 (8 bits × 2)
Horizontal	
Maximum record length	2.5 MW/CH, 50 MW total
Time axis accuracy <sup>*1</sup>	±0.005%
Time axis setting	100 µsec to 5 sec (in steps of 1, 2, or 5) 10 sec to 60 min (in steps of 1-2-3-5-6) 100 min/120 min/300 min 10 h/20 h/30 h/50 h/100 h/120 h 10 days/20 days/30 days
Acquisition modes	
Normal	Maximum sample rate of 10 MS/s
Envelope	Holds the peak value at each module's maximum sample rate
Box average	Increases the A/D resolution by up to 4 bits (to 16 bits)
Averaging	Number of averages 2 to 65536 (2 <sup>2</sup> steps)
Roll	Roll display for recording time of 1 sec or more
Triggers	
Modes	AUTO, AUTO LEVEL, NORMAL, SINGLE, SINGLE(n)
Trigger position	0 to 100% (in steps of 0.1%)
Simple triggers	Source CH1 to CH16, LINE, EXT, LOGIC_A, LOGIC_B, Time Slope selection CH1 to CH16: Rise, fall, rise/fall EXT (external trigger input), LOGIC_A, LOGIC_B: Rise/fall Time: Date (year/month/date), hour (hours/minutes), time interval (1 min to 24 hours)
Enhanced triggers	Source CH1 to CH16, LOGIC_A, LOGIC_B (each logic bit can be combined with AND or OR logic)
Enhanced triggers	Type A→B(n), A delay B, B > Time, B Time Out, Period, Window, Wave Window
■ Wave Window mode restriction: ACQ mode: NORMAL; Trig mode: Normal, Single, Single(N); Sample rate: 500 kHz to 10 kHz Not available in roll mode or envelope. Modules that can use the Wave Window trigger are the 701250/51/55/60/61/62 (in their respective voltage modes).	
Screen updating rate	Max 30 times/sec for a single waveform

## Display

Display	10.4-inch color TFT liquid crystal display
Effective screen size	211.1 mm × 158.4 mm
Resolution	800 × 600 <sup>*1</sup>
Waveform display pixels	650 × 512 (normal waveform display) 750 × 512 (in wide waveform display mode)
Display modes	Split Single, dual, triad, quad, octal, or hectal Zoom Main, Main&Z1, Main&Z1&Z2, Main&Z2, Z1ONLY, Z2 ONLY, Z1&Z2 (Z1 and Z2 are abbreviations for zoom area 1 and 2, respectively)
	XY Single Mode (X is fixed, Y is set by user), Quad Mode (XY1, XY2, XY3, XY4)
Accumulation	PERSIST Overlays in 1 color
■ The LCD may contain some pixels that are always ON or always OFF. In addition, variations in brightness may occur due to the characteristics of liquid crystal display. This does not indicate any problem with the display.	

## Printer

Built-in printer	
Printing method	Thermal line-dot
Paper	A4 size (210 mm wide × 20 m)
Effective recording width	200 mm = 1600 dots
Functions	Real time printing, XY printing, screen copying
High resolution printing of specified range	Zoom Print, Fine Print (print specified range in high resolution)
Maximum printing speed	20 mm/s (500 ms/div)
Real time printing (chart recorder mode)	
Functions	Print/record waveforms in real time and automatically save to memory in the background (up to 1000 div)
Resolution	Vertical 8 dots/mm A4 size (200 mm) = 1600 dots Horizontal 10 dots/mm A4 size (300 mm) = 3000 dots
Waveform printing	Speeds: 20 mm/s (500 ms/div), 10 mm/s, 5 mm/s, 2 mm/s, 1 mm/s, 100 mm/min, 50 mm/min, 25 mm/min, 20 mm/min, 10 mm/min, 5 mm/min, 2 mm/min, 1 mm/min, 100 mm/h, 50 mm/h, 25 mm/h, 20 mm/h, 10 mm/h
Print length (shot length)	Continuous, 20 cm, 50 cm, 1 m, 2 m
Memory length	2.5 MW/CH fixed, 1000 div (depending on the chart speed)
Numerical printing	Digital values Interval: 1 s, 2 s, 5 s, 10 s, 15 s, 20 s, 30 s, 1 min, 2 min, 5 min, 10 min, 15 min, 20 min, 30 min, 60 min Print directions: standard or rotated 180°C
Print format	Vertical Select 1, 2, 3, 4, 8, or 16 axis divisions Flexible zone function available when one division selected
Vertical axis format	Select 1 division = 10 div printed or 1 div = 10 mm printed
Extra information	Gauge display, upper/lower limits, channel markers, time
Annotations	CH information, messages, CH data
Reprint function	Reprints after STOP (enables resetting of format and range specification)
Print start/stop	PDF file output function Starts printing on triggers (Single mode, Repeat (Normal) mode): Specified length printed upon triggers.
External terminal	Start/stop input terminal (L = start, H = stop)

XY recorder mode	
Functions	Prints XY plots in high resolution Emulates an XY plotter
Resolution	Vertical 8 dots/mm × 200 mm = 1600 dots Horizontal 8 dots/mm × 200 mm = 1600 dots
Max number of recordable waveforms	4 (any group of 4)
Sample rate	5 kS/s max
Memory length	1 MW/CH
Record format	XY single (fixed)
Zoom Print/Fine Print function	
Functions	Enables high resolution printing of waveforms, also when not in real time mode
	Zoom print Quickly prints the portion zoomed with the GigaZoom engine in high resolution
	Fine print Prints the range specified by cursors in high resolution
Print format	Vertical Same format as in real-time mode Horizontal Print length can be specified

## Analysis functions

Ch-to-ch calculation function	
Definable MATH waveforms:	8
Calculable record length:	Up to 800 kWord (MATH1 only) Up to 100 kWord (MATH 1~8)
Operators	Addition, subtraction, multiplication, division, binary conversion, phase shifting, FFT
FFT type	PS
Points	1000, 2000, 10000
Window functions	Rectangular, Hanning, Flattop

## Waveform measurement functions

Cursors	
Types	Horizontal (H) Two cursors Vertical (V) Two horizontal axis cursors Marker Two vertical axis cursors Degree Cursor measured on the horizontal axis is displayed in a degree (T-Y display only) For X-Y display only
H & V	For X-Y display only
Automatic computation of waveform parameters	
Maximum number of measured parameters	24
Measured parameters	P-P, Max, Min, High, Low, Avg, Rms, Amp, StdDiv, +Oshot, -Oshot, Rise, Fall, Freq, Period, +Duty, +Width, -Width, Pulse, Burst1, Burst2, Avg Freq, Avg, Period, Rdelay, Fdelay, Int1TY, Int2TY, Int1XY, Int2XY
Cycle statistical process	
Maximum number of cycles	48,000 (for one parameter)
Maximum total number of parameters	48,000 (total measured results)
Statistical values	Maximum, minimum, average, standard deviation, number of samples
Maximum measuring range	10 MW
Auto scroll	Zoom automatically moves in a specified direction
History search function	Zone search, parameter search

## Screen data output functions (printer)

Destinations	Select built-in printer, external USB printer, or network printer (with the /C10 option)
Formats	Normal Outputs hard copy of screen shot Fine Zooms the displayed waveform along the time axis

## Screen data output function (image saving)

Destinations	PC card, external SCSI drive, or USB memory Built-in hard drive (with the /C8 option) or network drive (with the /C10 option)
Formats	PNG, JPEG, BMP, PostScript

## External I/O

Input points	8 bits × 2
Input type	Switch between TTL level or contact input (with model 702911 and 702912)
Sample rate	10 MS/s
Compatible probes	700986 (non-isolated), 700987 (isolated), 702911 (non-isolated), 702912 (non-isolated)
EXT TRIG IN/EXT TRIG OUT	
Connector	RCA pin jack
Input/output level	TTL (0 to 5 V) input
EXT Clock IN	
Connector	RCA pin jack
Input level	TTL (0 to 5 V) input
Input frequency	Up to 1 MHz (applicable models: 701250/51/55) Up to 100 kHz (for modules: 701260/61/62/70/71) Up to 500 Hz (for module 701265)
Communication interfaces	GP-IB, USB peripheral equipment jacks (USB keyboards and USB printers) USB (rev1.1 compliant for connecting to PC), Ethernet (100Base-TX and 10Base-T compliant, with /C10 option), SERIAL (RS232), SCSI
Start/Stop input	
Connector type	Modular jack (RJ12)
I/O level	TTL (0 to 5 V)
Probe power terminal (with /P4 option)	
Maximum number of probes powered	4
Compatible probes	Current probes 701933 (30 A) and 701930 (50 A)
Maximum number of current probes that can be used at one time	2



## Acquisition memory backup function

Batteries	Four AA alkaline dry cells (AA/R6) (JIS, IEC type name: LR6), or four nickel-metal hydride rechargeable batteries
Backed up data	Acquisition memory and waveform data
Backup duration (approximate)	Approximately 150 hours
■ Actual backup duration will vary according to operating conditions	

## Media drives

Internal media drives	PC card, 40 GB hard disk drive (with /C8 option)
-----------------------	--

## General specifications

Rated supply voltage	100 to 120 VAC/200 to 240 VAC (switches automatically)
Rated supply frequency	50/60 Hz
Power consumed	Approximately 200 VA-MAX
Withstand voltage	1500 VAC for one minute across power supply and ground
Insulating resistance	10 MΩ or greater at 500 VDC across power supply and ground
Exterior	Approximately 355 (W) × 250 mm (H) × 225 mm (D), excluding handle and protrusions
Weight	Approximately 8.0 kg (main unit only, with full options, including /C8, /C10, /P4) Approximately 10.3 kg (main unit and eight 701250 modules)
Operating temperature range	5°C to 40°C

# Main Specifications (plug-in modules)

\*1 Under standard operating conditions (temperature of 23°C ±5°C, 55% ±10% RH, warm-up of 30 min. or more), after calibration. Recommended calibration period: 1 year.  
Note that the strain modules (701270/71) must be balanced.

\*2~\*11 See the figure on page 11 for notes on the maximum input voltage and maximum allowable common mode voltage.

## High-Speed 10 MS/s, 12-Bit Isolation Module (Model 701250)

Input channels	2
Input couplings	AC, DC, GND
Maximum sample rate	10 MS/s
A/D conversion resolution	12 bits (1,500 LSB/range)
Input type	Isolated unbalanced
Frequency range (-3 dB) *1	DC, up to 3 MHz
Input range (10:1)	500 mV to 2 kV (in steps of 1, 2, or 5)
(1:1)	500 mV to 200 V (in steps of 1, 2, or 5)
Effective measurement range	2 times the setting range
DC offset	1/2 the setting range
Maximum input voltage (1 kHz or less)	
In combination with 700929 (10:1) *2	600 V (DC + ACpeak)
Direct input (1:1) *6,*10	250 V (DC + ACpeak)
Maximum allowable common mode voltage	
In combination with 700929 (10:1) *3	400 Vrms (CAT II), 300 Vrms (CAT II)
In combination with 701901 + 701954 (1:1) *9	400 Vrms (CAT II), 300 Vrms (CAT II)
Main unit only (1:1) *11	42 V (DC+ACpeak) (CAT I and CAT II, 30 Vrms)
DC accuracy *1	±0.5% of range
Input impedance	1 MΩ ±1%, approximately 35 pF
Connector type	Isolated type BNC connector
Input filter	OFF, 500 Hz, 5 kHz, 50 kHz, 500 kHz
Temperature coefficient	Zero point ±(0.05% of range)/°C (typical value)
Gain	±(0.02% of range)/°C (typical value)

## High-Speed 1 MS/s, 16-Bit Isolation Module (Model 701251)

Input channels	2
Input couplings	AC, DC, GND
Maximum sample rate	1 MS/s
A/D conversion resolution	16 bits (24,000 LSB/range)
Input type	Isolated unbalanced
Frequency range (-3 dB) *1	DC, up to 300 kHz (50 mV to 200 V range)
Input range (10:1)	100 mV to 2 kV range (in steps of 1, 2, or 5)
(1:1)	10 mV to 200 V range (in steps of 1, 2, or 5)
Effective measurement range	2 times the setting range
DC offset	1/2 the setting range
Maximum input voltage (1 kHz or less)	
In combination with 700929 (10:1) *2	600 V (DC + ACpeak)
Direct input (1:1) *6,*10	140 V (DC + ACpeak)
Maximum allowable common mode voltage	
In combination with 700929 (10:1) *3	400 Vrms (CAT II), 300 Vrms (CAT II)
In combination with 701901 + 701954 (1:1) *9	400 Vrms (CAT II), 300 Vrms (CAT II)
Main unit only (1:1) *11	400 V (DC+ACpeak) (CAT I and CAT II, 30 Vrms)
DC accuracy *1	50 mV to 200 V ± (0.25% of range) 20 mV range ± (0.3% of range) 10 mV range ± (0.5% of range)
Input impedance	1 MΩ ±1%, approximately 35 pF
Connector type	Isolated type BNC connector
Input filter	OFF, 400 Hz, 4 kHz, 40 kHz
Temperature coefficient	Zero point 50 mV to 20 V range ±(0.02% of range)/°C (typical value) 20 mV range ±(0.05% of range)/°C (typical value) 10 mV range ±(0.10% of range)/°C (typical value)
Gain	10 mV to 200 V range ±(0.02% of range)/°C (typical value)

## High-Voltage 100 kS/s, 16-Bit Isolation Module (with RMS) (Model 701260)

Input channels	2
Input couplings	AC, DC, GND, AC-RMS, DC-RMS
Maximum sample rate	100 kS/s
A/D conversion resolution	16 bits (24,000 LSB/range)
Input type	Isolated unbalanced
Frequency range (-3 dB) *1	DC, up to 40 kHz
Waveform measurement mode	DC, 40 Hz to 10 kHz
RMS measurement mode	DC, 40 Hz to 10 kHz
Input range (10:1)	2 V to 20 kV range (in steps of 1, 2, or 5)
(1:1)	200 mV to 2 kV range (in steps of 1, 2, or 5)
Effective measurement range	2 times the setting range
DC offset	1/2 the setting range

Maximum input voltage (1 kHz or less)	
In combination with 700929 (10:1) *2	1000 V (DC + ACpeak)
In combination with 701901 + 701954 (1:1) *6	850 V (DC + ACpeak)
Maximum allowable common mode voltage (1 kHz or less)	
In combination with 700929 (10:1)	H side: 1000 Vrms (CAT II) *4, L side: 400 Vrms (CAT II) *5
In combination with 701901 + 701954 (1:1)	H side: 700 Vrms (CAT II) *7, L side: 400 Vrms (CAT II) *8
Direct input (when using a cable that does not conform with the safety standard)	H/L sides: 30 Vrms (42 VDC+ACpeak) *11
DC accuracy (waveform measurement mode) *1	± (0.25% of range)
DC accuracy (RMS measurement mode) *1	± (1.0% of range)
AC accuracy (RMS measurement mode) *1	
Sinewave input	± (1.5% of range)
Crest factor 2 or less	± (2.0% of range)
Crest factor 3 or less	± (3.0% of range)
Input impedance	1 MΩ ±1%, approximately 35 pF
Connector type	Isolated type BNC connector
Input filter	OFF, 100 Hz, 1 kHz, 10 kHz
Temperature coefficient (waveform measurement mode)	
Zero point	±(0.02% of range)/°C (typical value)
Gain	±(0.02% of range)/°C (typical value)
Response time (in RMS measurement mode)	
Rise 0->90% of range	100 ms typ.
Fall 100->10% of range	250 ms typ.
Crest factor (RMS measurement only)	3 or less
■ Please use 701901 (1:1 safety adaptor lead) or 700929 (10:1 safety probe) which conforms with the safety standard, for high-voltage input.	
■ Using cables that do not conform to safety standards is very dangerous.	

## Frequency Module (Model 701280)

Frequency measurement section	
Input channels	2
Data update rate	25 kHz (40 μs)
Measurement range(Frequency)	0.01 Hz to 200 kHz
Measurement range(Frequency)	1 Hz to 500 kHz range
Minimum measurement resolution	50 ns (20 MHz)
Input section	
Compatible input signals	Encoder pulse input of up to ±42 V Electromagnetic pickup input (power generator type) *6 AC power supply input of up to 300 Vrms (model 700929 isolation probe required)
Input type	Isolated unbalanced
Input couplings	AC, DC
Input voltage ranges (±FS)	(1:1) ±1 V to ±50 V (6 ranges, steps of 1, 2, or 5) (10:1) ±10 V to ±500 V (6 ranges, steps of 1, 2, or 5)
Maximum input voltage (1 kHz or less)	
In combination with 700929 (10:1) *2	420 V (DC + ACpeak)
Direct input (1:1) *10	420 V (DC + ACpeak)
Maximum allowable common mode voltage	
In combination with 700929 (10:1) *3	300 Vrms (CAT II)
Direct input (1:1) *11	42 V (DC+ACpeak) 30 Vrms (CAT II)
Input impedance	1 MΩ ±1%, approximately 35 pF
Connector type	Isolated type BNC connector
Input filters	OFF, 100 Hz, 1 kHz, 10 kHz, 100 kHz
Input pull-up function (can be turned ON/OFF)	Supports open collector, mechanical contact output, 4.7 kΩ (+5 V)
Chattering elimination function	Setting time 1 ms to 1000 ms
Comparator section	Preset Logic (5 V, 3 V, 12 V, 24 V), electromagnetic pickup, zero cross, pull-up (5 V), AC100V, AC200V, user-defined
Threshold range	± FS range, resolution 1% units
Hysteresis	±1%, ±2.5%, ±5% of FS
LED display (per CH) ACT (green)	Operating status (lights during pulse input)
OVER (red)	Overdrive status (lights when input exceeds range)
Compatible probes/cables	(10:1 probe) 700929/701940 (1:1 cable) 366926

## Main Specifications (plug-in modules)

### Measurement function details

Measurable parameters	(Frequency (Hz), rpm, rps, period (sec), duty (%), power supply frequency (Hz), pulse width (sec), pulse integration, speed)
Effective measurement range	2 times the setting range
Resolution of measured data	16 bit (24,000 LSB/range)
Measured parameters and measuring range	

Measured parameter	Measuring Range	Range
Frequency (Hz)	0.01 Hz to 200 kHz	1 Hz to 500 kHz
Rpm	0.01 rpm to 100,000 rpm	1 rpm to 100,000 rpm
Rps	0.001 rps to 2000 rps	0.1 rps to 2,000 rps
Period (sec)	5 $\mu$ s to 50 s	100 $\mu$ s to 50 s
Duty (%)	0% to 100%	10% to 200%
Power supply frequency (Hz)	(50 Hz, 60 Hz, 400 Hz) $\pm$ 20 Hz	1 Hz to 20 Hz
Pulse width (sec)	2 $\mu$ s to 50 s	100 $\mu$ s to 50 s
Pulse integration	Up to $2 \times 10^9$ count	$100 \times 10^{-20}/\text{div}$ to $500 \times 10^{-21}/\text{div}$
Speed	Measuring range same as frequency (units can be converted to km/h, etc.)	

### Auxiliary measurement functions

Smoother filter (Moving average)	A moving average is applied to smooth the observed stair-step shaped waveform. The moving average orders are based on a specified time (moving average order = set time $\div$ 40 $\mu$ s). Filters are set at 0.1 ms to 1000 ms for reducing jitter and increasing resolution.
Pulse average function	A mode in which a specified number of pulses are measured together and averaged, with a specifiable number of pulses from 1 to 4096. It has the same effect as the smoothing filter, but averaging is performed at the pulse interval. Even if the encoder interval is uneven, pulses can be measured together and averaged out.
Deceleration prediction	Automatically compensates for lack of information on encoder pulses occurring during deceleration (application of the brake) and calculates a deceleration curve.
Stop prediction (braking application)	A stop is inferred if no pulses are input for a period of time, and output is set to 0. Up to 10 steps can be specified.
Offset observation function	You can set the observational center and zoom the surrounding fluctuations (supports fluctuation observation). Offset setting range = (range $\div$ 3 100)

- Power generation electromagnetic pickup: Given output within 0.2 Vpp to 42 Vpp. Minimum sensitivity is 0.2 V (at 1:1) or more, connected with 1:1 cable. For types that require a power supply or terminal resistance, apply to the sensor side.

- Minimum input must be 0.2 Vpp or more. Measurement conditions:
  - During frequency/period measurement: 1 Vpp/1  $\mu$ s square wave input (range =  $\pm$ 10 V, bandwidth = FULL, and hysteresis =  $\pm$  1%)
  - During DUTY/pulse width measurement: 1 Vpp/5 ns square wave input (range =  $\pm$ 10 V, bandwidth = FULL, and hysteresis =  $\pm$  1%)
  - During power supply frequency measurement: 90 Vrms sinewave input (range = AC1000V, BW = 100 kHz)

### Measurement accuracy<sup>1)</sup>

- Frequency/Revolution/Velocit measurements
  - Measurement accuracy  $\pm$  (0.05% of range + accuracy depends on the input waveform frequency)
  - Accuracy depends on the input waveform frequency
 

1 Hz to 2 kHz	0.05% of input waveform frequency + 1 mHz
2 kHz to 10 kHz	0.1% of input waveform frequency
10 kHz to 20 kHz	0.3% of input waveform frequency
20 kHz to 200 kHz	0.5% of input waveform frequency
- Period measurement
  - Measurement accuracy  $\pm$  (0.05% of range + accuracy depends on the input waveform interval)
  - Accuracy depends on the input waveform interval
 


500 $\mu$ s to 50 s	0.05% of input waveform interval
100 $\mu$ s to 500 $\mu$ s	0.1% of input waveform interval
50 $\mu$ s to 100 $\mu$ s	0.3% of input waveform interval
5 $\mu$ s to 50 $\mu$ s	0.5% of input waveform interval + 0.1 $\mu$ s
- Duty measurement
  - Accuracy depends on the input waveform frequency
 

0.1 Hz to 1 kHz	$\pm$ 0.1% of 100%
1 kHz to 10 kHz	$\pm$ 0.2% of 100%
10 kHz to 50 kHz	$\pm$ 1.0% of 100%
50 kHz to 100 kHz	$\pm$ 2.0% of 100%
100 kHz to 200 kHz	$\pm$ 4.0% of 100%
- Pulse width measurement
  - Measurement accuracy  $\pm$  (0.05% of range + accuracy depends on input waveform pulse width)
  - Accuracy depends on input waveform pulse width
 

500 $\mu$ s to 100 s	0.05% of input waveform pulse width
100 $\mu$ s to 500 $\mu$ s	0.1% of input waveform pulse width
50 $\mu$ s to 100 $\mu$ s	0.3% of input waveform pulse width
2 $\mu$ s to 50 $\mu$ s	0.5% of input waveform pulse width + 0.1 $\mu$ s
- Power supply frequency measurement
  - Measurement accuracy
 

Center frequency at 50, 60 Hz, accuracy of $\pm$ 0.03 Hz, resolution of 0.01 Hz
Center frequency at 400 Hz, accuracy of $\pm$ 0.03 Hz, resolution of 0.01 Hz

### Example of accessory combinations

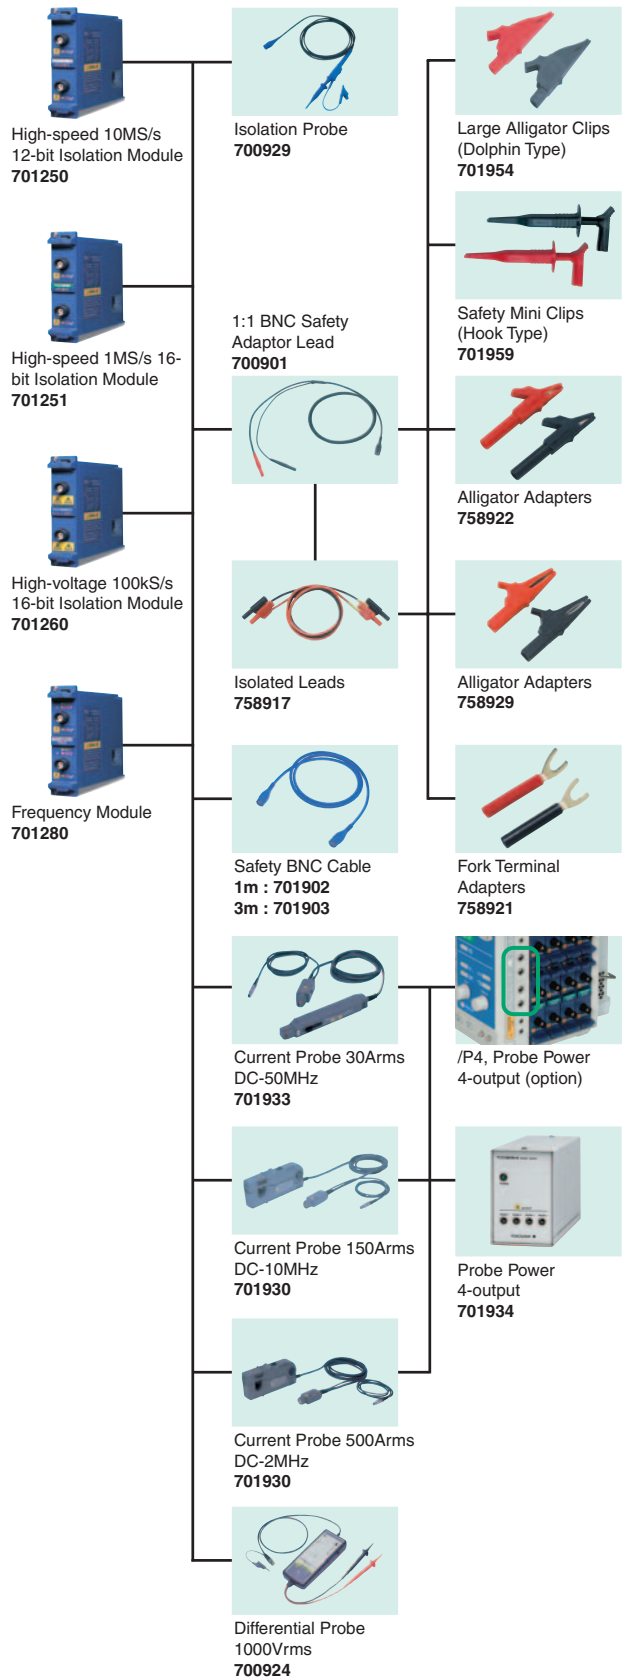

- The actual voltage that can be used is the lowest of the specification for the module, cable, or adapter.

## High-Speed 10 MS/s, 12-Bit Non-Isolation Module (Model 701255)

Input channels	2
Input couplings	AC, DC, GND
Maximum sample rate	10 MS/s
A/D conversion resolution	12 bits (1,500 LSB/range)
Input type	Non-isolated unbalanced
Frequency range	(-3 dB) <sup>†</sup> DC, up to 3 MHz
Input range	(10:1) 500 mV to 2 kV range (in steps of 1, 2, or 5) (1:1) 50 mV to 200 V range (in steps of 1, 2, or 5)
Effective measurement range	2 times the setting range
DC offset	1/2 the setting range
Maximum input voltage (1 kHz or less)	
In combination with 701940	(10:1) 600 V (DC + ACpeak)
Direct input	(1:1) 250 V (DC + ACpeak)
DC accuracy <sup>†</sup>	± (0.5% of range)
Input impedance	1 MΩ ± 1%, approximately 35 pF
Connector type	Metal type BNC connector
Input filter	OFF, 500 Hz, 5 kHz, 50 kHz, 500 kHz
Temperature coefficient	Zero point ±(0.05% of range)/°C (typical value) Gain ±(0.02% of range)/°C (typical value)
Adaptive passive probe	(10:1) 701940

## Acceleration/Voltage Module (with AAF) (Model 701275)

Input channels	2
Input type	Switchable between acceleration and voltage input AAF (anti-aliasing filter) supports both acceleration and voltage
Input couplings	(AC coupling for acceleration) ACCL, (voltage) AC, DC, GND
Maximum sample rate	100 kS/s
A/D conversion resolution	16 bit (24,000 LSB/range)
Input type	Isolated unbalanced
Frequency band (-3 dB) <sup>†</sup>	(Acceleration) 0.4 Hz to 40 kHz (Voltage) DC, up to 40 kHz
AC coupling, Acceleration/voltage	0.4 Hz or less
Input range	
For acceleration (±5 V = ×1 range)	X0.1– ×1–X100 (in steps of 1, 2, or 5)
For voltage (10:1)	500 mV range to 1 kV range (in steps of 1, 2, or 5)
For voltage (1:1)	50 mV range to 100 V range (in steps of 1, 2, or 5)
■ This module's insulation is functional insulation. Even when using a probe, 42 V or higher input is not considered safe.	
Effective measurement range	2 times the setting range
DC offset	1/2 the setting range
Maximum input voltage (1 kHz or less)	42 V (DC + ACpeak)
Maximum allowable common mode voltage <sup>††</sup>	42 V (DC+ACpeak) 300 Vrms (CAT II)
Accuracy <sup>†</sup>	For voltage (DC accuracy) ± (0.25% of range) For acceleration (AC accuracy) ± (0.5% of range) (at 1 kHz)
Input impedance	1 MΩ ± 1%, approximately 35 pF
Connector type	Metal type BNC connector
Input filters	OFF, Auto (AAF), 4 kHz, 400 Hz, 40 Hz
Anti-aliasing filter (AAF)	
Cutoff frequency	(when fs=50 Hz to 100 kHz, fs ≤ 50 Hz, fc is fixed to 20 Hz) fc (cutoff frequency) = fs (sampling frequency) × 40% fc automatically linked with the sampling frequency.
Cutoff characteristics	-65 dB at 2 × fc (typical)
Temperature coefficient (for voltage) (excluding when filter = AUTO)	
Zero point	±(0.02% of range)/°C (typical value)
Gain	±(0.02% of range)/°C (typical value)
Acceleration sensor bias (constant current drive)	Constant current drive = 4 mA ±10%, voltage 22 V
Examples of compatible acceleration sensors:	Built-in amp type: Kistler Instruments Corp., Piezotron®; PCB Piezotronics Inc., ICP®, Endevco Corp., Isotron2® Something that supports acceleration sensor and bias is 4 mA/22 V.
■ Piezotron is a registered trademark of Kistler Instrument Corp. ICP is a registered trademark of PCB Piezotronics Inc. Isotron2 is a registered trademark of Endevco Corp.	
Sensor usage notes:	Sensors are sensitive to physical shock and heat. If shocks or temperature changes occur that are outside of the standard operating conditions, measurement may not be possible for several minutes.
Compatible probes/cables for voltage	(10:1 probe) 701940/700929 (1:1 cable) 366926


## Strain Module (NDIS) (Model 701270)

Input channels	2
Input types	DC bridge input (automatic balancing), balanced differential input, DC amplifier (floating)
Automatic balancing	Electronic auto-balance
Automatic balancing range	±10,000 μSTR (1 gauge method)
Bridge voltages	Select 2 V, 5 V, or 10 V
Gauge resistances	120 Ω to 1000 Ω (bridge voltage 2 V) 350 Ω to 1000 Ω (bridge voltage 2 V, 5 V, 10 V)
Gauge rate	1.90 to 2.20 (variable in 0.01 steps)
A/D resolution	16 bits (48,000 LSB/± FS: Upper = +FS and Lower = -FS)
Maximum sample rate	100 kS/s
Frequency range (-3 dB) <sup>†</sup>	DC, up to 20 kHz
DC accuracy <sup>†</sup>	± (0.5% of FS + 5 μSTR)
Measurement range/measurable range	
Measurement range (FS)	Measurable range (FS to +FS)
500 μSTR	-500 μSTR to 500 μSTR
1000 μSTR	-1000 μSTR to 1000 μSTR
2000 μSTR	-2000 μSTR to 2000 μSTR
5000 μSTR	-5000 μSTR to 5000 μSTR
10,000 μSTR	-10,000 μSTR to 10,000 μSTR
20,000 μSTR	-20,000 μSTR to 20,000 μSTR
mV/V range support	mV/V range = 0.5 × (μSTR range/1000)
Maximum allowable input voltage (1 kHz or less)	10 V (DC + ACpeak)
Maximum allowable common mode voltage	42 V (DC+ACpeak) (CAT I & CAT II, 30 Vrms)
Temperature coefficient	Zero point ±5 μSTR/°C (typical value) Gain ±(0.02% of FS)/°C (typical value)
Internal filter	OFF, 1 kHz, 100 Hz, 10 Hz
Input connector	NDIS standard
Accessory (set of solderable connector shells)	connector shells
NDIS connector (A100JC), 1 unit	
Recommended bridge head	(NDIS type) (sold separately) 701955 (120 Ω) (comes with 5 m cable) 701956 (350 Ω) (comes with 5 m cable)

## Strain Module (supports DSUB shunt cal) (Model 701271)

Input channels	2
Input types	DC bridge input (automatic balancing), balanced differential input, DC amplifier (floating)
Automatic balancing method	Electronic auto-balance
Automatic balancing range	±10,000 μSTR (1 gauge method)
Bridge voltages	Select 2 V, 5 V, or 10 V
Gauge resistances	120 Ω to 1000 Ω (bridge voltage 2 V) 350 Ω to 1000 Ω (bridge voltage 2 V, 5 V, 10 V)
Gauge rate	1.90 to 2.20 (can be set in 0.01 steps)
A/D resolution	16 bit (48,000 LSB/± FS: Upper = +FS and Lower = -FS)
Maximum sample rate	100 kS/s
Frequency range (-3 dB) <sup>†</sup>	DC, up to 20 kHz
DC accuracy <sup>†</sup>	±(0.5% of FS + 5 μSTR)
Measurement range/measurable range	
Measurement range (FS)	Measurable range (FS to +FS)
500 μSTR	-500 μSTR to 500 μSTR
1000 μSTR	-1000 μSTR to 1000 μSTR
2000 μSTR	-2000 μSTR to 2000 μSTR
5000 μSTR	-5000 μSTR to 5000 μSTR
10,000 μSTR	-10,000 μSTR to 10,000 μSTR
20,000 μSTR	-20,000 μSTR to 20,000 μSTR
mV/V range support	mV/V range = 0.5 × (μSTR range/1000)
Maximum allowable input voltage (1 kHz or less)	10 V (DC + ACpeak)
Maximum allowable common mode voltage	42 V (DC+ACpeak) (CAT I & CAT II, 30 Vrms)
Temperature coefficient	Zero point ±5 μSTR/°C (typical value) Gain ±(0.02% of FS)/°C (typical value)
Internal filter	OFF, 1 kHz, 100 Hz, 10 Hz
Input connector	DSUB
Accessory (set of solderable connector shells)	DSUB connector, 1 unit
Recommended bridge head	(supports DSUB shunt CAL) (sold separately) 701957 (120 Ω) (with 5 m cable) 701958 (350 Ω) (with 5 m cable)

## Module Accessories

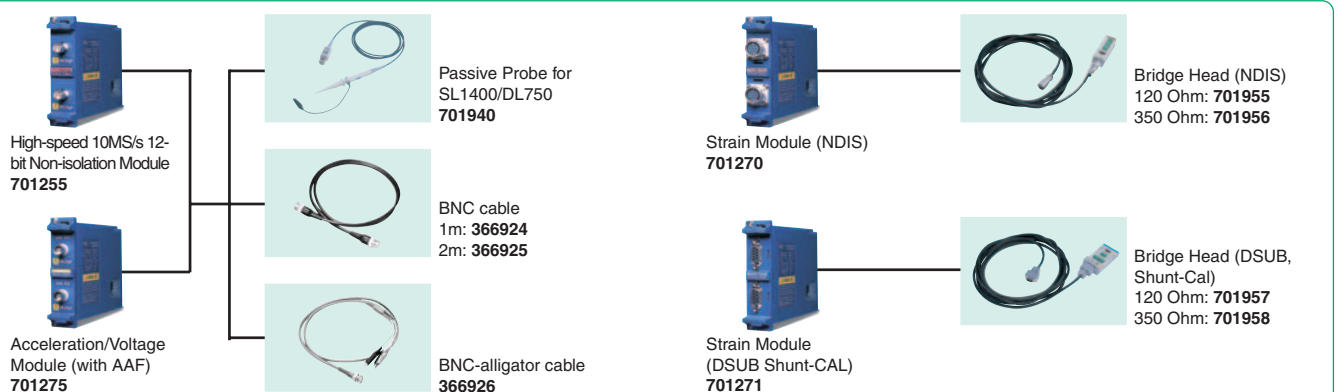



## Main Specifications (plug-in modules)

### Universal (Voltage/Temperature) Modules (701261/701262)

Input channels	2
Input signals	Voltage or temperature (thermocouple)
AAF (anti-aliasing filter)	701261: none, 701262: included
Input couplings	TC (thermocouple), DC, AC, GND
Input types	Isolated unbalanced
Maximum sample rate	100 kS/s
Data updating rate	500 Hz
A/D conversion resolution	Voltage, 16 bits (24,000 LSB/range), temperature, 0.1°C resolution
Frequency range (-3 dB) <sup>1</sup>	Voltage DC, up to 40 kHz Temperature DC, up to 100 Hz
Input range	Voltage (1:1) 50 mV to 200 V range (10 div display, steps of 1, 2, or 5) Temperature K, E, J, T, L, U, N, R, S, B, W, iron doped gold/chromel
Effective measurement range (voltage)	2 times the setting range
DC offset (voltage)	1/2 the setting range
DC accuracy <sup>1</sup> (voltage)	± (0.25% of range)
Temperature measured range/accuracy <sup>1</sup>	
(Reference junction temperature compensation accuracy is not included)	

Type	Measured range	Accuracy
K	-200°C to 1300°C	±(0.1% of reading + 1.5°C)
E	-200°C to 800°C	However, for -200°C to 0°C: ±(0.2% of reading + 1.5°C)
J	-200°C to 1100°C	
T	-200°C to 400°C	
L	-200°C to 900°C	
U	-200°C to 400°C	
N	0°C to 1300°C	
R, S	0°C to 1700°C	±(0.1% of reading + 3°C) However, for 0°C to 200°C: ±8°C 200°C to 800°C: ±5°C
B	0°C to 1800°C	±(0.1% of reading + 2°C) However, for 400°C to 700°C: ±8°C The effective range is 400°C to 1800°C
W	0°C to 2300°C	±(0.1% of reading + 3°C)
Gold/chromel	0 K to 300 K	0 to 50 K: ±4 K 50 to 300 K: ±2.5 K

Maximum input voltage (1 kHz or less)	42 V (DC + ACpeak) Since the input connector is of a binding post type, when the following safety standards are met, it is possible to touch the metal part of the connector. Therefore for safety reasons, the maximum value is 42 V (DC+ACpeak). 150 V (DC+ACpeak): Input section maximum allowable voltage (maximum value at which the input circuit will not be damaged)
Maximum allowable common mode voltage (1 kHz or less)	42 V (DC+ACpeak) (CAT I & CAT II, 30 Vrms)
Input connector	Binding post
Input impedance	Approximately 1 M Ω
Input filters	Voltage OFF, AUTO (AAF), 4 kHz, 400 Hz, 40 Hz (-12 dB, oct, except AUTO) Temperature OFF, 30 Hz, 8 Hz, 2 Hz
AAF (anti-aliasing filter)	when $f_s = 50$ Hz to 100 kHz, $f_s \leq 50$ Hz or less is fixed to $f_c = 20$ Hz 701262 only Cutoff frequency $f_c = f_s$ (sampling frequency) $\times 40\%$ $f_c$ is automatically linked with the sampling frequency. Cutoff characteristics: -65 dB at $2Xf_c$ (typical) Except when Filter = AUTO
Temperature coefficient (for voltage)	Zero point ±(0.01% of range)/°C (typical value) Gain ±(0.02% of range)/°C (typical value)
Compatible cable	366961 (banana-to-alligator clip, 1:1)



1:1 Banana-alligator Cable  
366961

Shunt Resistor for 4-20mA Measurement  
250 Ohm ± 0.1% : **438920**  
100 Ohm ± 0.1% : **438921**  
10 Ohm ± 0.1% : **438922**

### Temperature/High-Precision Voltage Module (701265)


Input channels	2
Input couplings	TC (thermocouple), DC, GND
Input type	Isolated unbalanced
Applicable sensors (Input couplings: TC)	K, E, J, T, L, U, N, R, S, B, W, iron doped gold/chromel
Data updating rate	500 Hz
Frequency range (-3 dB) <sup>1</sup>	DC, up to 100 Hz
Voltage accuracy <sup>1</sup> (in voltage mode)	± (0.08% of range + 2 μV)

Temperature measurement range/accuracy<sup>1</sup>  
(Reference junction temperature compensation accuracy is not included)

Type	Measured Range	Accuracy
K	-200°C to 1300°C	±(0.1% of reading + 1.5°C)
E	-200°C to 800°C	However, for -200°C to 0°C: ±(0.2% of reading + 1.5°C)
J	-200°C to 1100°C	
T	-200°C to 400°C	
L	-200°C to 900°C	
U	-200°C to 400°C	
N	0°C to 1300°C	
R, S	0°C to 1700°C	±(0.1% of reading + 3°C) However, for 0°C to 200°C: ±8°C However, for 200°C to 800°C: ±5°C
B	0°C to 1800°C	±(0.1% of reading + 2°C) However, for 400°C to 700°C: ±8°C The effective range is 400°C to 1800°C
W	0°C to 2300°C	±(0.1% of reading + 3°C)
Iron doped gold/chromel	0 to 300 K	0 to 50 K: ±4 K 50 to 300 K: ±2.5 K

Maximum input voltage (1 kHz or less)	42 V (DC+ACpeak) (CAT I & CAT II, 30 Vrms)
Input range (for 10 div display)	1 mV to 100 V range (in 1/2/5 steps)
Input connector	Binding post
Input impedance	Approximately 1 M Ω
Input filter	OFF, 2 Hz, 8 Hz, 30 Hz
Temperature coefficient (voltage)	Zero point ±(0.01% of range)/°C + 0.5 μV/°C (typical value) Gain ±(0.02% of range)/°C (typical value)

### Logic Probe Accessories and Carrying Case



Logic Input Terminals




Carrying Case  
701967



High-speed Logic Probe  
700986



Isolated Logic Probe  
700987



Isolated Logic Measurement Leads  
758917



Alligator Adapters  
758922




Alligator Adapters  
758929



Logic Probe (TTL level/Contact Input)  
1m: **702911**  
3m: **702912**

## Maximum Input Voltage/Maximum Allowable Common Mode Voltage

See Specifications of Plug-in Modules

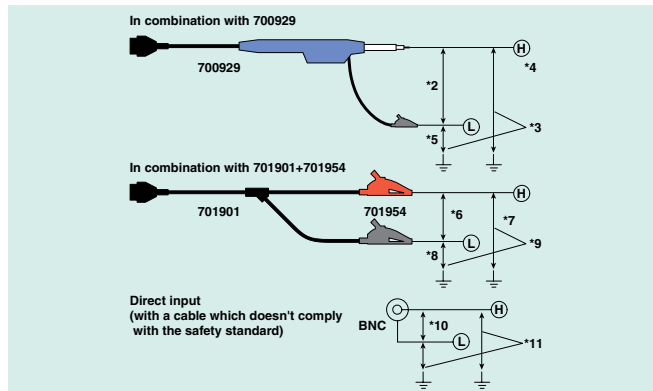

### Warning

Do not exceed the maximum input voltage, withstand voltage, or surge current. In order to prevent electric shock, be sure to ground the main unit. In order to prevent electric shock, be sure to tighten the module's screws. Otherwise, electrical protective functions and mechanical protective functions will not be effective.

## Logic Probe (702911: 1 m, 702912: 3 m)

Number of inputs	8
Input types	Non-isolated (common ground for all bits, main unit logic inputs and bits share common ground)
Maximum input voltage	$\pm 35$ V
Response time	3 $\mu$ s or less
Input impedance	10 k $\Omega$ or higher
Threshold level	Approximately 1.4 V
Input method	TTL level or contact input (switchable)

## High-Speed Logic Probe (700986)

Number of inputs	8
Input types	Non-isolated (common ground for all bits; logic module and bits share common ground)
Maximum input voltage (1 kHz or less) (between probe tip and case ground)	42 V (DC + AC peak) (CAT I and II, 30 Vrms)
Response time	1 $\mu$ s or less
Input impedance	Approximately 100 k $\Omega$
Threshold level	Approximately 1.4 V

## Isolated Logic Probe (700987)

Number of inputs	8
Input types	Isolated (all individual bits are isolated)
Input connector	Safety connector (banana plug) 3.8
Input switching capability	AC/DC input switching for each bit
Applicable input ranges	DC input H/L detection for 10 V DC to 250 V DC AC input H/L detection (50/60 Hz) for 80 V AC to 250 V AC
Threshold levels	DC input 6 V DC $\pm$ 50% AC input 50 V AC $\pm$ 50%
Response times	DC input 1 ms or less AC input 20 ms or less
Maximum input voltage (1 kHz or less)	(between H and L of each bit) 250 Vrms (CAT I and II)
Maximum allowable in-phase voltage	250 Vrms (CAT I and II)
Maximum allowable voltage between bits	250 Vrms (CAT I and II)
Input impedance	Approximately 100 k $\Omega$



# Web Server Functions

Connect the SL1400 to your PC through the Ethernet connection. This allows for easy remote operation using Internet Explorer.




## FTP

You can easily copy and paste files to and from a PC and the instrument's flash memory or other storage media.

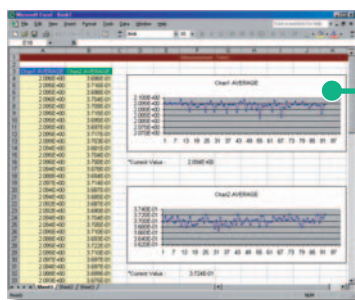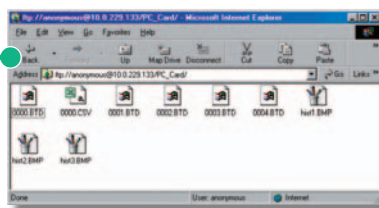

## Measurement Trend

Using Internet Explorer, you can periodically or manually download screen images to a PC for remote waveform monitoring. You can also download waveform data, start or stop a measurement, or setup a split display all from a PC.

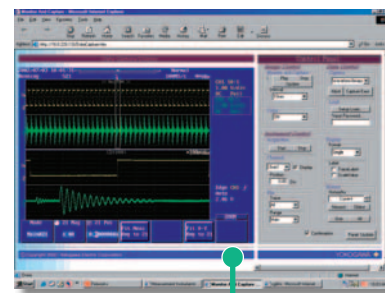


## Data Capture

This function downloads values of waveform parameters periodically, launches MS Excel and graphs the parameters on a spreadsheet values. This enables you to check the parameter trends at a glance.

## Integrated Software; Supporting waveform Viewer, File transfer and Remote Control

### Xviewer (701992)



Xviewer is a PC software application designed to work with Yokogawa's DL series digital oscilloscopes and ScopeCorder series. Xviewer allows you to display DL and SL-acquired waveform data (using the


"Viewer" function), perform file transfers, and control DL and ScopeCorder series instruments remotely.

- A trial version and upgrade version of this software program can be downloaded:  
[http://www.yokogawa.com/tm/dl/701992/tm-701992\\_01.htm](http://www.yokogawa.com/tm/dl/701992/tm-701992_01.htm)

## Software for Waveform Measurement on a PC

### Software for Remotely Controlling the SL1400

### Wirepuller



The Wirepuller software program displays a screen image of the SL1400's front panel on your PC so that you can monitor waveform signals. In addition, you can use the PC's mouse and keyboard to

control the SL1400. The SL1400 can be controlled via an Ethernet, USB, or GP-IB.

This software program can be downloaded from the following URL (requires registration):

<http://www.yokogawa.com/tm/Bu/DLsoft/wire/>

Further details are available at the YOKOGAWA web site.



# Standard Main Unit Accessories

## Model Numbers and Suffix Codes

Model	Suffix Code	Description
701240		SL1400P main unit (16 isolated channels slots + 16-bit logic) <sup>1</sup> 210 mm width A4 thermal printer built-in
Power cable <sup>2</sup>	-D	UL/CSA standard
	-F	VDE standard
	-R	AS standard
	-Q	BS standard
	-H	GB standard (Complied with CCC)
Internal media drive <sup>2</sup>	-J0	non Drive
	-J3	PC card drive
Language <sup>2</sup>	-HE	English, English Panel
	-HJ	Japanese, Japanese Panel
	-HC	Chinese, English Panel
	-HG	German, English Panel
	-HF	French, English Panel
	-HL	Italian, English Panel
	-HK	Korean, English Panel
Other specifications	-HS	Spanish, English Panel
	/C8	Internal 40 GB hard drive (FAT32)
	/C10	Ethernet option
	/P4	Probe power (4-output)

1. Plug-in modules are not included.  
2. Choose only one.


## Standard Accessories

Name	Order Qty.
Power cable (3-prong to 2-prong adapter included)	1
User's manuals (one set)	1
Transparent front panel cover	1
Printer roll paper, for DL750P and SL1400 (A4, 20 m roll)	1
Cover panels (for empty module slots)	8
Rubber feet (four per set)	1
Soft case (for storing accessories)	1

## Plug-in Module Model Numbers

Model	Description
701250	High-speed 10 MS/s 12-bit Isolation Module (2 CH)
701251	High-speed 1 MS/s 16-bit Isolation Module (2 CH)
701255	High-speed 10 MS/s 12-bit non-Isolation Module (2 CH)
701260	High-voltage 100 kS/s 16-bit Isolation Module (2 CH, with RMS)
701261	Universal Module (2 CH)
701262	Universal Module (with Anti-Aliasing Filter, 2 CH)
701265	Temperature/high-precision voltage Module (2 CH)
701270	Strain Module (NDIS, 2 CH)
701271	Strain Module (DSUB, Shunt-CAL, 2 CH)
701275	Acceleration Module (with Anti-Aliasing Filter, 2 CH)
701280	Frequency Module (2 CH)

■ Probes not included with any modules.

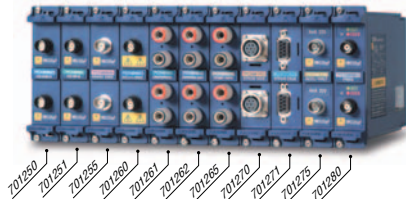

## SL1400 Accessories

Product	Model No.	Description <sup>1</sup>
Isolated probe	700929	1000 Vrms-CATII for 701250, -51, and -60 (10:1)
1:1 BNC safety adapter lead (in combination with the following)	701901	1000 Vrms-CATII for 701250, -51, and -60
Safety mini clip (hook type)	701959	1000 Vrms-CATII, 1 set each of red and black
Large Alligator clip (dolphin type)	701954	1000 Vrms-CATII, 1 set each of red and black
Alligator adapter (rated volt.: 1000 V)	758929	1000 Vrms-CATII, 1 set each of red and black
Alligator adapter (rated volt.: 300 V)	758922	300 Vrms-CATII, 1 set each of red and black
Fork terminal adapter	758921	1000 Vrms-CATII, 1 set each of red and black
Passive probe for SL1400 <sup>2</sup>	701940	Non-isolated 600 Vpk (701255) 42 V or less (other) (10:1)
1:1 BNC-alligator cable	366926	Non-isolated 42 V or less, for 701250, -51, -55, 1 m
1:1 Banana-alligator cable	366961	Non-isolated 42 V or less, for 701261, -62, -65, 1.2 m
Current probe <sup>3</sup>	701933	30 Arms, DC to 50 MHz, supports probe power
Current probe <sup>3</sup>	701930	150 Arms, DC to 10 MHz, supports probe power
Current probe <sup>3</sup>	701931	500 Arms, DC to 2 MHz, supports probe power
Probe power <sup>4</sup>	701934	Large current output, external probe power supply (4 outputs)
Shunt Resistor	438920	250 Ω±0.1%, 4-20 mA Measurement
Shunt Resistor	438921	100 Ω±0.1%, 4-20 mA Measurement
Shunt Resistor	438922	10 Ω±0.1%, 4-20 mA Measurement
Differential probe	700924	1400V pk, 1000 Vrms-CAT II
Bridge head (NDIS, 120 Ω/350 Ω)	701955/56	With 5 m cable
Bridge head (DSUB, Shunt-cal 120 Ω/350 Ω)	701957/58	With 5 m cable
Safety BNC-banana adapter	758924	500 Vrms-CATII, for 701250, -51, -55, -60
Printer roll paper	701966	SL1400, A4 size (210 mm wide × 20m), include 6 rolls
Logic Probe (1m) <sup>5</sup>	702911	8-bit, non-isolated, TTL level/Contact Input
Logic Probe (3m) <sup>5</sup>	702912	8-bit, non-isolated, TTL level/Contact Input
High-speed logic probe <sup>5</sup>	700986	8-bit, non-isolated, response speed: 1μs
Isolated logic probe <sup>5</sup>	700987	8-bit, each channel isolated, response speed: 20 ms (for AC)
Isolated logic measurement leads	758917	Isolated logic measurement leads (2 per set) Alligator clip required separately.
CF Card Adapter	772090	Adapter for CF Card
CF Card	772091	128 MB
CF Card	772092	256 MB
Conversion adaptor	366928	BNC (jack)-RCA (plug) conversion
Safety BNC cable (1 meter)	701902	1000 Vrms-CATII (BNC-BNC)
Safety BNC cable (2 meters)	701903	1000 Vrms-CATII (BNC-BNC)
Soft carrying case	701967	For SL1400, with 3 storage pockets

\*1 Actual allowable voltage is the lower of the voltages specified for the main unit and cable.

\*2 42 V is safe when using the 701940 with an isolated type BNC input.


\*3 The number of current probes that can be powered from the main unit's probe power supply is limited. For details, please refer to <http://www.yokogawa.com/tm/Bu/probe/>.

\*4 A number of externally powered probes can be used.

\*5 Includes one each of the B9879PX and B9879KX connection leads.

\*6 Additionally, 758917 and either the 758922 or 758929 are required for measurement.

## External Dimensions

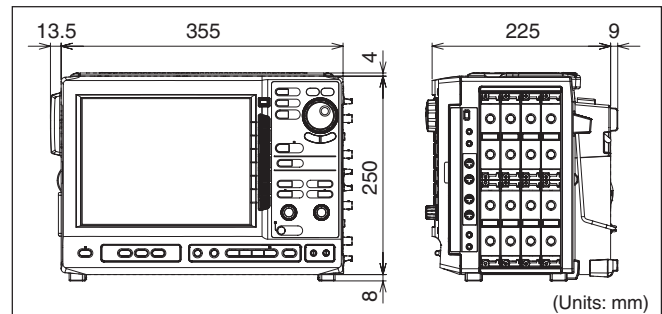

### Note



Before operating the product, read the user's manual thoroughly for proper and safe operation.

# YOKOGAWA

## YOKOGAWA CORPORATION OF AMERICA

2 Dart Road, Newnan, Georgia 30265-1094, U.S.A.  
Phone: (1)-770-253-7000, Fax: (1)-770-251-6427

## YOKOGAWA EUROPE B.V.

Databankweg 20, 3821 AL, Amersfoort, THE NETHERLANDS  
Phone: (31)-33-4641858, Fax: (31)-33-4641859

## YOKOGAWA ENGINEERING ASIA PTE. LTD.

5 Bedok South Road, Singapore 469270  
Phone: (65)-62419933, Fax: (65)-62412606

## YOKOGAWA MEASURING INSTRUMENTS KOREA CORP.

Phone: (82)-2-551-0660, Fax: (82)-2-551-0665

## YOKOGAWA SHANGHAI TRADING CO., LTD.

Phone: (86)-21-5405-0303, Fax: (86)-21-6880-9254

## YOKOGAWA ELECTRIC CORPORATION

Communication & Measurement Business Headquarters

2-9-32 Nakacho, Musashino-shi, Tokyo, 180-8750 Japan

Phone: (81)-422-52-6768, Fax: (81)-422-52-6624

E-mail: [tm@cs.jp.yokogawa.com](mailto:tm@cs.jp.yokogawa.com)

Represented by :

MM-16E

Subject to change without notice.

All Rights Reserved, Copyright© 2006, Yokogawa Electric Corporation.

[Ed : 01/b]

Printed in Japan, 605(KP)